

# EP Series Servo System

## EP1C

General Purpose Servo Drive

EP1C Plus  

High Performance Servo Drive

EP3E    

Multi-Network Servo Drive

## M/G Series

AC Servo Motor



**Maxsine** 迈信电气

武汉迈信电气技术有限公司  
WUHAN MAXSINE ELECTRIC CO.,LTD





## Company Profile

Founded in 2004, Maxsine focuses on R&D, manufacturing and sales of Servo system. We are committed to providing advanced products and first-class services for customers in the field of industrial automation.

With nearly a decade of continuous efforts and more than two decades of technical accumulation and innovation, Maxsine has become a leading technology enterprise in China. On the basis of owning technologies with proprietary intellectual property rights, we offer reliable, high performance and precision digital AC servo drive and permanent magnetic synchronous motor to serve global customers. All of Maxsine servo drives are provided with a superior DSP which represents a high-speed performance of the control circuit loop.

We cooperate with machine makers in various applications such as CNC machine tools, packaging, textile, robots, laser processing, and automation production lines. Maxsine servo products are exported to Southeast Asia, India, South Africa, Russia and Brazil etc. Our mission is to help industrial companies be more productive.

## Maxsine Products

### Advanced servo system

EP3E Multi-Network Servo Drive: PROFINET/EtherCAT/POWERLINK/MECHATROLINK-III, AC220V/380V, 0.1kW~15kW

EPR6 6-axis Servo Drive for Robot: AC220V, 6-axis total power 7.5kW

### High performance general purpose servo system

EP1C Plus High Performance Servo Drive: AC220V/380V, 0.1kW~15kW

EP1C General Purpose Servo Drive: AC220V/380V, 0.1kW~15kW

EPX Servo Drive for Position Control: AC220V, 0.4kW~2.5kW

### Special purpose servo system

EP3L DC Servo Drive: DC24V~48V, 0.2kW~0.4kW

EP3M Turret Servo Drive: AC220V/380V, 0.1kW~15kW

### AC permanent magnet servo motor

MS: medium and low inertia, high speed, high dynamic performance, torque range  $0.32\text{N} \cdot \text{m} \sim 14.3\text{N} \cdot \text{m}$

MA: medium and low inertia, medium speed, low current, torque range  $4.0\text{N} \cdot \text{m} \sim 48.0\text{N} \cdot \text{m}$


GS: high inertia, high speed, torque range  $0.64\text{N} \cdot \text{m} \sim 15.0\text{N} \cdot \text{m}$

GA: high inertia, medium speed, torque range  $4.0\text{N} \cdot \text{m} \sim 15.0\text{N} \cdot \text{m}$

# Stable and Reliable Servo System


## 23-bit High-resolution encoder

- 23-bit encoder with 8,388,608 pulses/revolution enables smooth and precise operation.
- Multi-turn absolute encoder can count up to 65,536 turns.

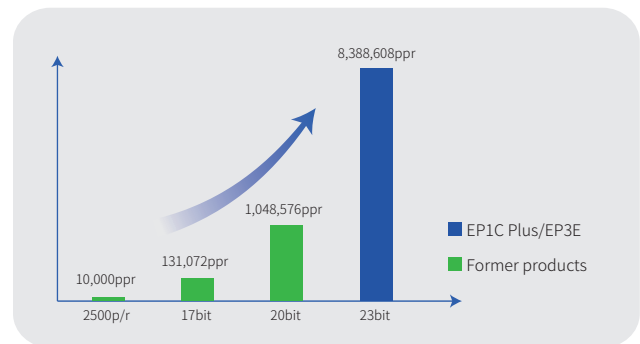


## M/G High dynamic performance servo motor

- Low inertia and high speed, and high torque to current ratio. Some low inertia motors can accelerate from -3000r/min to 3000r/min within only 6-7ms.

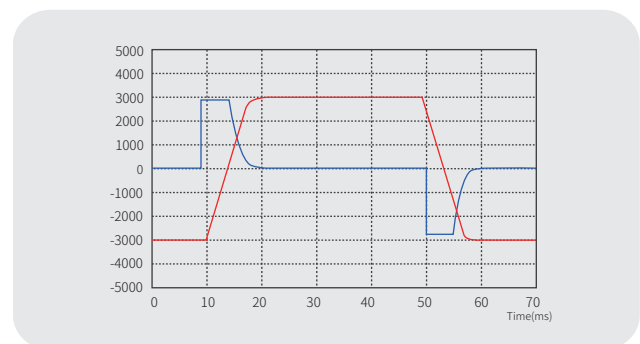


## M/G Servo motor low cogging torque

- The optimal combination of motor's pole number and cogging number greatly reduces the fluctuation range of electric torque and positioning torque to achieve a more smoothly operation.
- The anti-cogging / torque ripple suppression algorithm improves the torque precision effectively.

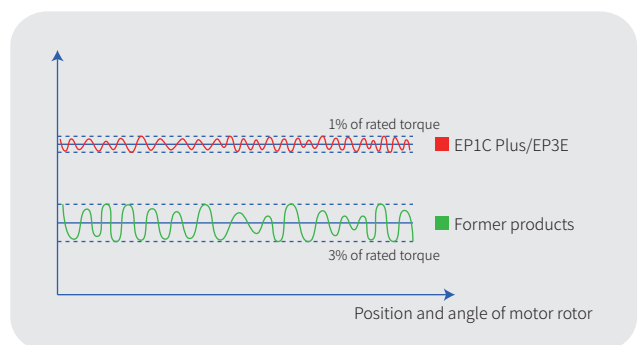

## IP65 rated motor for applications in wet factory environments


- M/G motor with IP65 rating protection.
- The motor shaft is equipped with seal.

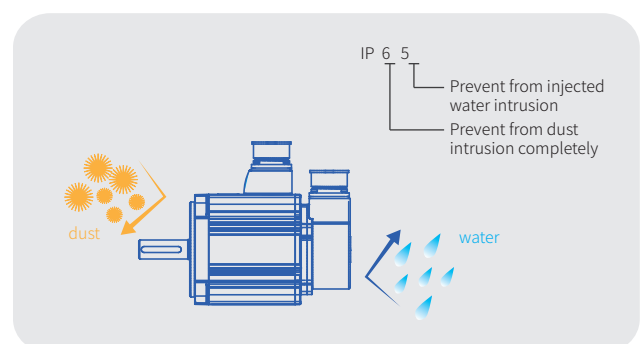

# Stable and Reliable Servo System

## 3KHz response bandwidth(velocity mode), 1ms settling time


- Velocity response bandwidth up to 3kHz.
- High response control based on the torque feed forward could reduce the response delay and optimize settling time up to 1ms.

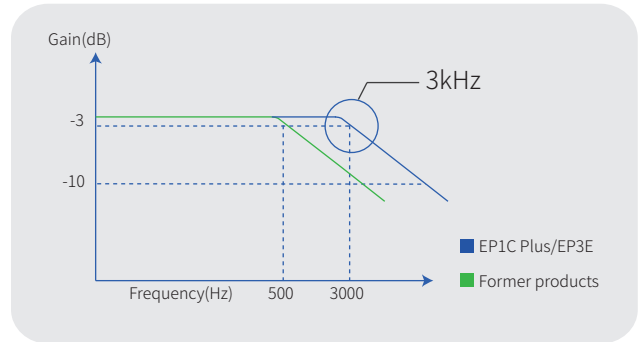

## The notch filter for High-frequency vibration suppression

### Manual/Auto notch filter


- The notch filter could suppress the vibration and audible noise greatly generated by the equipment resonant frequency. It is important to drive high speed and high accuracy.
- Two notch filters are available with adjustable width and depth, working frequency from 50-1500Hz.

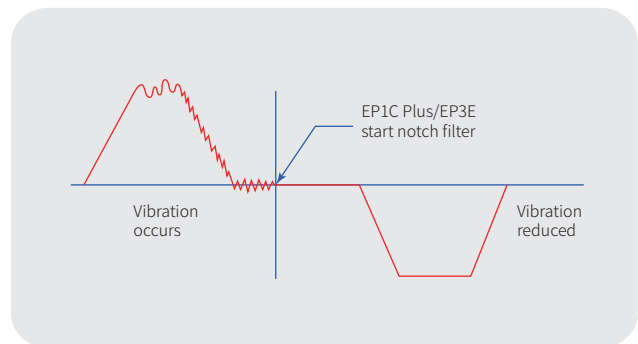

## The damping filter suppresses low frequency jitter


### The vibration filter

- The filter eliminates the natural vibration frequency and greatly reduce the vibration of axis when stopping, with an applicable frequency of 1-100Hz.

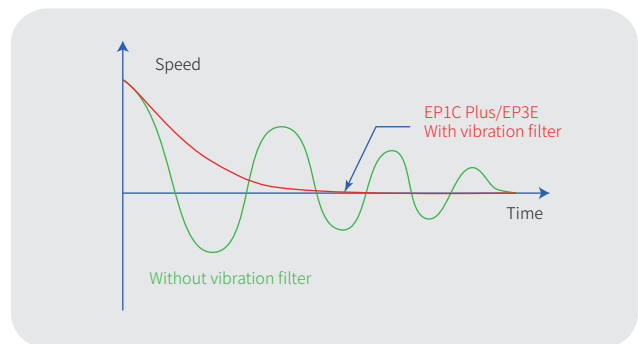

## EP1C Plus with 1M differential plus train input or optional single-ended input

- Both the instruction input and the feedback output frequency could reach 1Mpps, and the high resolution operation can be achieved. When the duty ratio of the instruction input pulse is deviated, the receiving frequency will decrease.
- Special version supports 24V NPN/PNP single ended drive connection and the highest frequency is 200kHz.

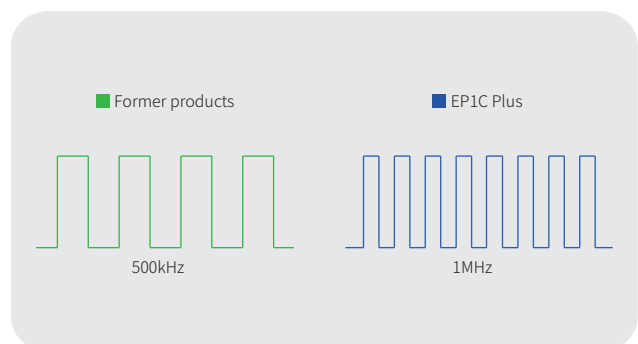


# Stable and Reliable Servo System

## EP1C Plus with optional Modbus/CAN/M-II communication

- Modbus protocol: applies to robot, digital control system, and automation equipment etc.
- M-II protocol: supports 17byte/32 byte transformat with USB Bus interface and 250μs -times communication cycle.
- CAN communications: customized communication protocol is provided.

Note:

Modbus and CAN communications are not standard configuration. Instead of CANOpen protocol, CAN communication adopts MCAN protocol which is suitable for embedded solution. Please contact sales for inquiry.

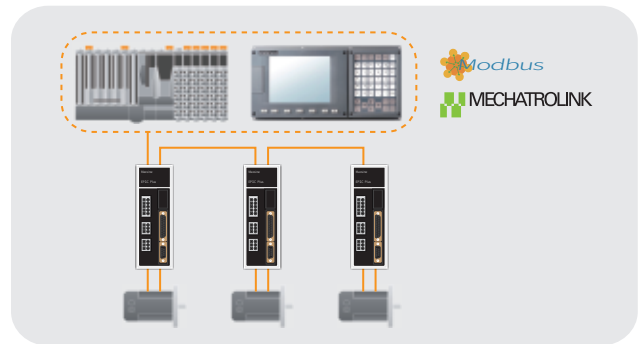

## EP3E Multi-Network servo drive with various industrial Ethernet protocols


Note:

customized protocols are also provided, please contact us for more information.



## ServoSoft: multifunctional software for quick setting

- USB communication interface, plug and play;
- Parameter reading and setting;
- Support real-time recording, online debugging.

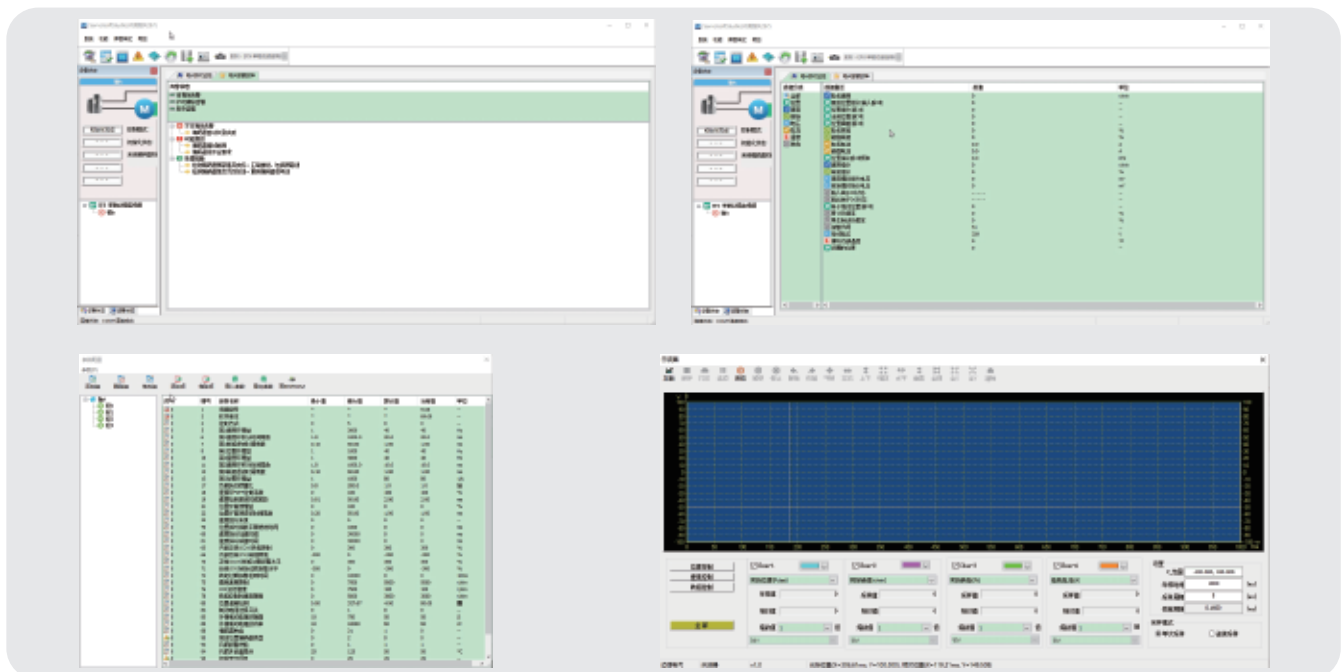

# EP1C Servo drive


## Technical data

EP1C series	TL01	TL02	TL05	TL08	TL10	TL15	TL25	TL35	TL55	TH06	TH10	TH15	TH20	TH30	TH50	TH75	TH90	TH110	TH150	
Rated output power (kW)	0.1	0.2	0.5	0.8	1.0	1.5	2.5	3.5	5.5	0.6	1.0	1.5	2.0	3.0	5.0	7.5	9.0	11.0	15.0	
Continuous output current (Arms)	1.0	1.8	3.0	4.0	5.0	7.5	12.0	19.0	24.0	2.0	3.5	5.4	8.5	13.0	17.0	21.0	25.5	32.0	39.0	
Instantaneous maximum output current (Arms)	3.0	5.4	9.0	10.0	11.3	14.9	22.6	28.5	40.0	6.0	7.1	10.0	12.7	28.3	31.2	39.6	44.0	55.0	78.0	
Input power supply	Main power supply	Single phase AC220V -15% ~ +10% 50/60Hz			3 phase AC220V -15% ~ +10% 50/60Hz					3 phase AC380V -15% ~ +10% 50/60Hz										
	Control power supply	Single phase AC220V -15%~+10% 50/60Hz								24V DC ±15% ≥1.5A										
Environment	Temperature	Operation: 0°C~40°C      Storage: -40°C~50°C																		
	Humidity	Operation: 40%~80% (No Condensation)      Storage: less than 93% (no condensation)																		
	Atmospheric pressure	86kPa~106kPa																		
Protection rating	IP20																			
Control method	Vector control																			
Regenerative resistor	External	Internal / External optional							External	Internal / External optional							External			
Encoder feedback	2500P/R Incremental encoder																			
Operation mode	Position, Speed, Torque, Position/Speed, Speed/Torque, Position/Torque																			
Digital inputs	5 programmable input terminals (photoelectric isolation)																			
Digital outputs	3 programmable input terminals (photoelectric isolation)																			
Encoder signal outputs	A, B, Z Differential output, Z signal open-collector output																			
Position	Input frequency	differential input: ≤500kHz (kpps),    single-ended input: ≤200kHz (kpps)																		
	Command modes	Pulse+Signal, CCW Pulse/CW Pulse, orthogonal Pulse																		
	Electronic gear ratio	1~32767 / 1~32767																		
Speed	Analog command input	-10V~+10V, Input impedance10kΩ																		
	Acceleration/-deceleration command	Parameter setting																		
	Command source	Analog, Internal Torque Instruction																		
Torque	Analog command input	-10V~+10V, Input impedance 10kΩ																		
	Speed limit	Parameter setting																		
	Command source	Analog, Internal Torque Instruction																		
Monitoring function	Revolving Speed, Current Position, Positional Deviation, Motor Torque, Motor Current, Instructions Pulse Frequency etc.																			
Protection function	Over speed, over voltage, over current, overload, braking abnormal, encoder abnormal, position deviation and so on																			
Characteristic	Velocity frequency response	≥300Hz																		
	Speed fluctuation rate	< ±0.03% (Load 0%~100%), < ±0.02% (Power-15%~+10%)																		
	Speed ratio	1 : 5000																		

# EP1C Servo drive



## Control mode

Take EP1C-TL15 series as an example. For the wiring of other drive models configuration, please refer to EP1C MANUAL.


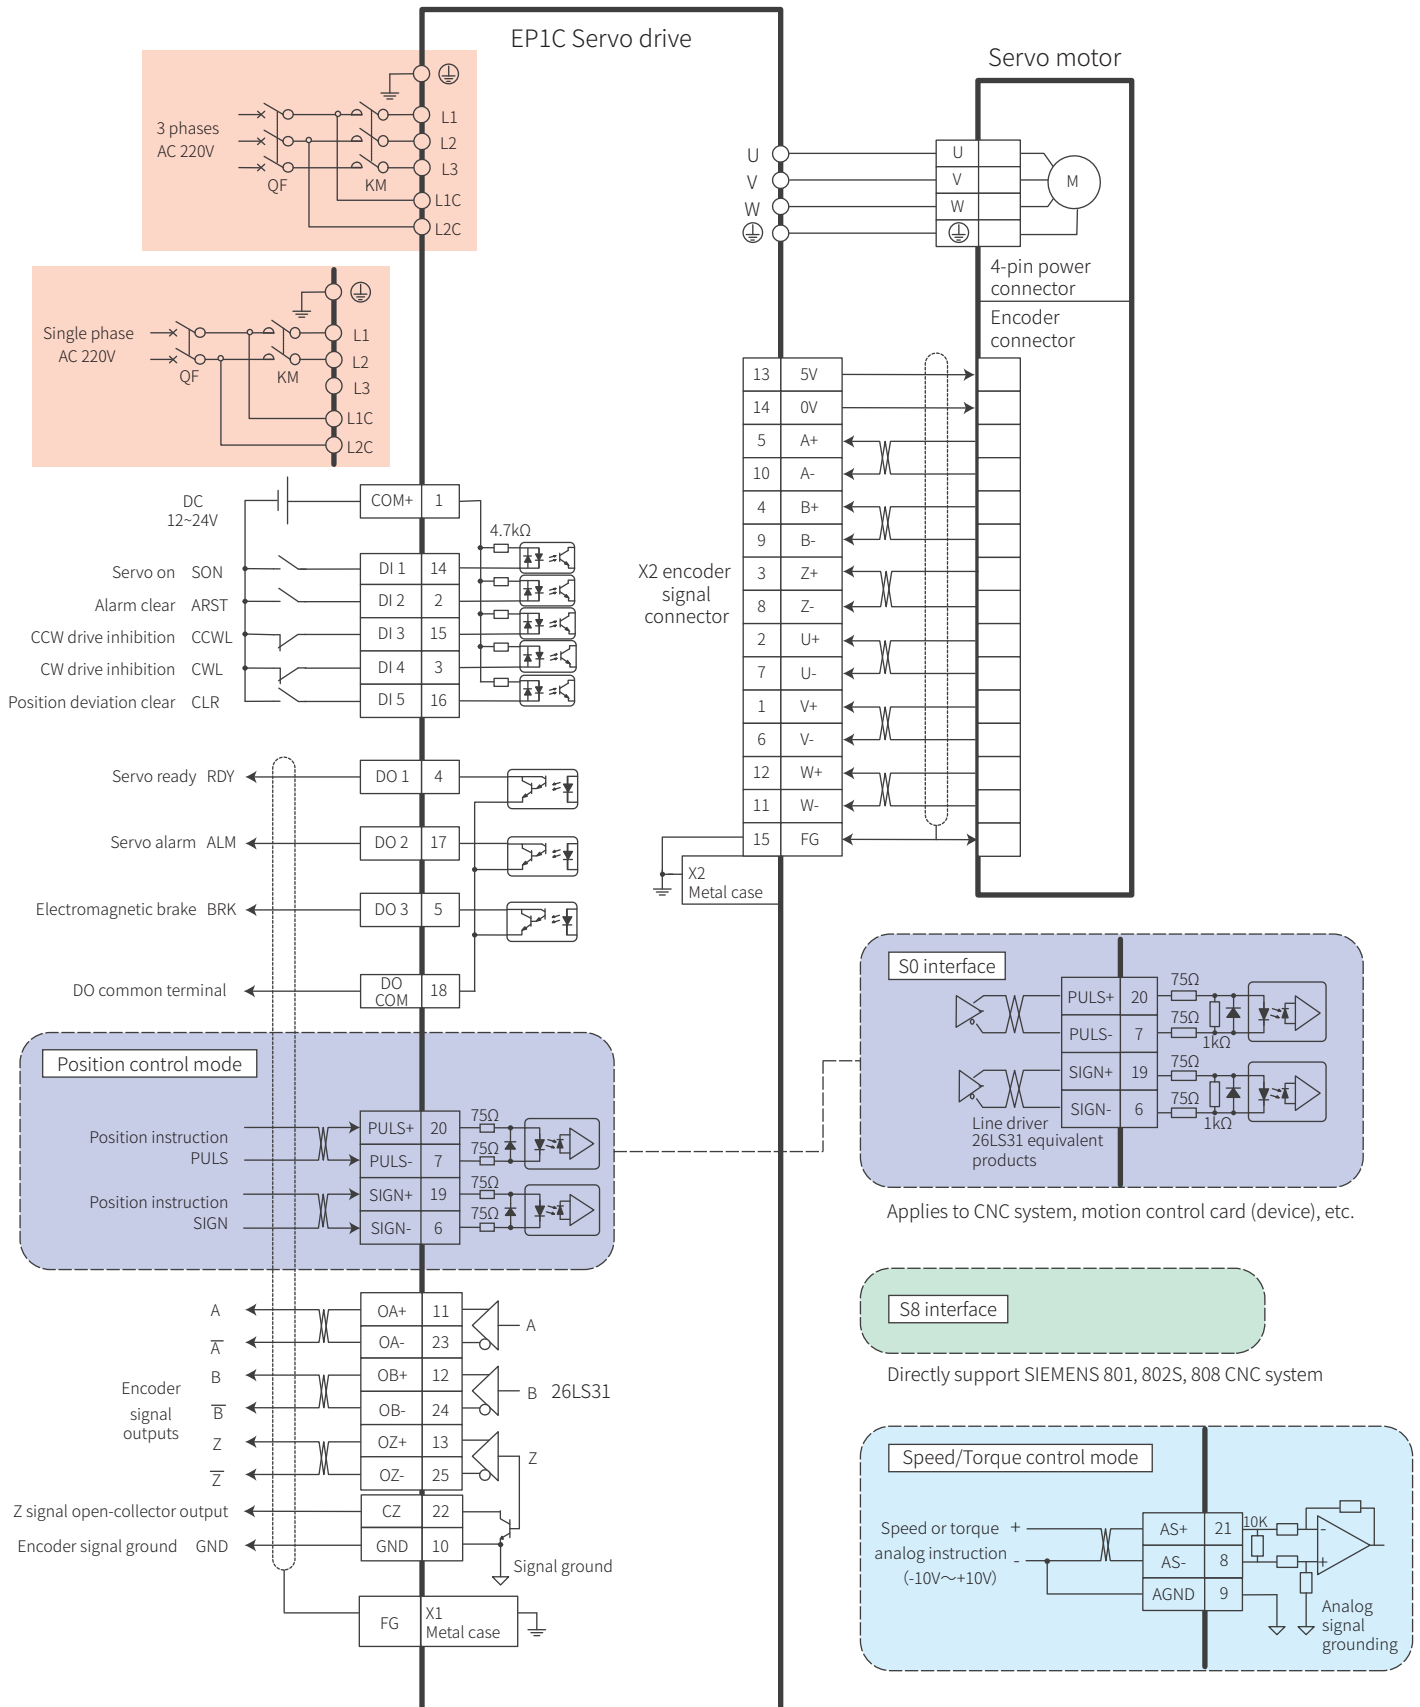


# EP1C Servo drive

## Dimension drawing

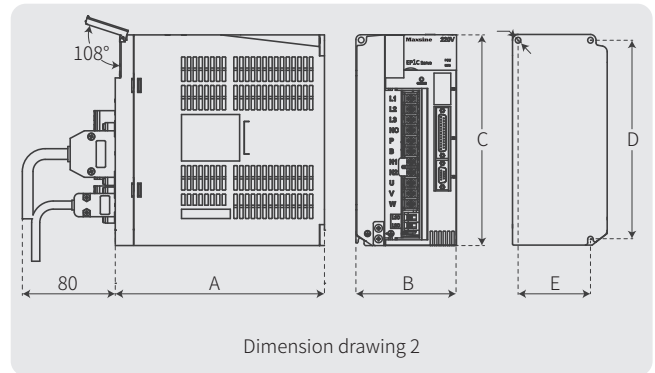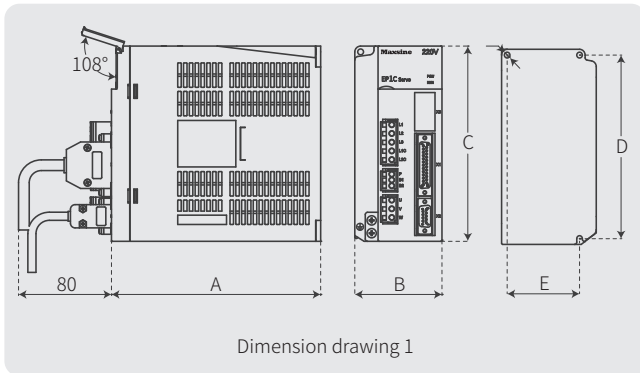

Model	Dimension drawing 1						Dimension drawing 2						
	TL01	TL02	TL05	TL08	TL10	TL15	TH06	TH10	TH15	TH20	TH30	TH50	TH75
A	150	150	180	180	180	180	180	180	180	180	180	210	210
B	55	65	75	85	95	95	95	95	95	105	105	115	115
C	168	168	168	168	168	168	168	168	200	220	220	250	250
D	158	158	158	158	158	158	158	158	189	209	209	239	239
E	--	55	65	65	65	65	65	65	84	94	94	104	104

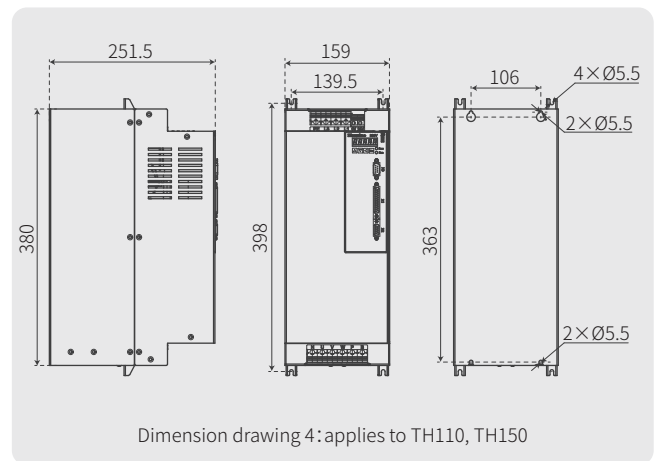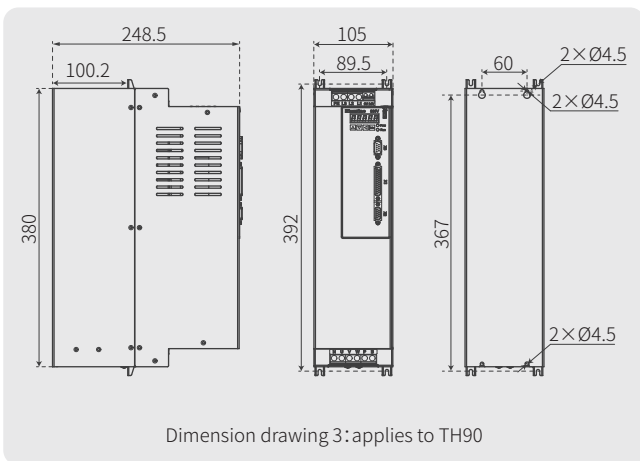




# EP1C Plus Servo drive

EP1C Plus series servo drive supports analog voltage, pulse train input and MECHATROLINK-II communication protocol. Take the following picture EP1C Plus-TL05 as an example.

EP1C Plus series





1. Display LED
2. Operation buttons
3. Main power input terminals
4. External regenerative resistor terminals
5. Servo motor connection terminals
6. Ground terminals
7. RJ45 interface X5, X6
8. USB interface X4
9. 2 indicators
10. Connector X1 for input and output signal
11. Connector X2 for servo motor encoder



1. Display LED
2. Operation buttons
3. Main power input terminals
4. External regenerative resistor terminal
5. Servo motor connection terminals
6. Ground terminals
7. USB interface X4
8. 2 indicators
9. Connector X3 for input and output signal
10. Connector X1 for MECHATROLINK-II interface
11. Connector X2 for servo motor encoder

## Power terminals description

Name	Symbol	Model name	Detailed description
Main circuit power	L1, L2	TL01, TL02, TL05	Single-phase 220VAC -15%~+10% 50/60Hz
	L1, L2, L3	TL08, TL10, TL15, TL25, TL35, TL55	Three-phase 220VAC -15%~+10% 50/60Hz
	L1, L2, L3	EP1C Plus-TH series	Three-phase 380VAC -15%~+10% 50/60Hz
Control circuit power	L1C, L2C	EP1C Plus-TL series	Single-phase 220VAC -15%~+10% 50/60Hz
	24V, 0V	EP1C Plus-TH series	External DC24V
Regenerative resistor	P, B1, B2	TL01, TL02, TL05, TL08, TL10, TL15, TL25, TH06, TH10, TH15	When using external regenerative resistor, disconnect B1 and B2, connect the external resistor to P and B1 ends, and let B2 be suspended
	NC, P, B	TL35, TL55, TH20, TH30, TH50, TH75, TH90, TH110, TH150	When using the external regenerative resistor, the internal regenerative resistor line between P and B should be disconnected, and connect the 2 internal regenerative resistor line to NC. Then crossover the external regenerative resistor to terminals P and B
DC reactor	N1, N2	TL35, TL55, EP1C Plus-TH series	Connect the DC reactor between N1 and N2 for harmonic suppression
Motor power	U	EP1C Plus full range	Output to motor U phase power supply
	V		Output to motor V phase power supply
	W		Output to motor W phase power supply
Grounding		EP1C Plus full range	Motor casting grounding terminals
			Drive grounding terminals

## X1 Connector signal instruction

Control signal terminal name	Pin No.	Function
Inputs	DI1	14
	DI2	2
	DI3	15
	DI4	3
	DI5	16
	COM+	1
Outputs	DO1	4
	DO2	17
	DO3	5
	DOCOM	18
Position command pulse	PULS+	20
	PULS-	7
	SIGN+	19
	SIGN-	6
Analog command inputs	AS+	21
	AS-	8
	AGND	9
Encoder output pulse	OA+	11
	OA-	23
	OB+	12
	OB-	24
	OZ+	13
	OZ-	25
	CZ	22
GND	10	
Shielded cable ground protection	Metal case of connector	

## X2 Connector signal instruction

Encoder signal	Pin No.		Function
	Absolute encoder	Incremental encoder	
Encoder power supply	5V	4	Use 5VDC power supply (provided by servo driver). If the cable is longer than 20m, in order to prevent encoder from voltage drop down, it is better to use multi wire or thick wire for power line and ground line
	0V	5	
Signal input	SD+	1	Connect to absolute encoder signal output
	SD-	2	
Shielding wire protection	FG	9	Connect to signal cable shielding line


## X5, X6 Interface signal instruction

RJ45	Pin No.	Function
RS-485	485B	1
	485A	2
	485-GND	6
CAN	CANH	4
	CANL	5
	CAN-GND	8
Shield ground	PE	7
	PE	3

# EP1C Plus Servo drive

## Control mode

Here takes EP1C Plus-TL series (220V) as an example. For the wiring of EP1C Plus-TH series (380V) configuration, please refer to EP1C Plus MANUAL.

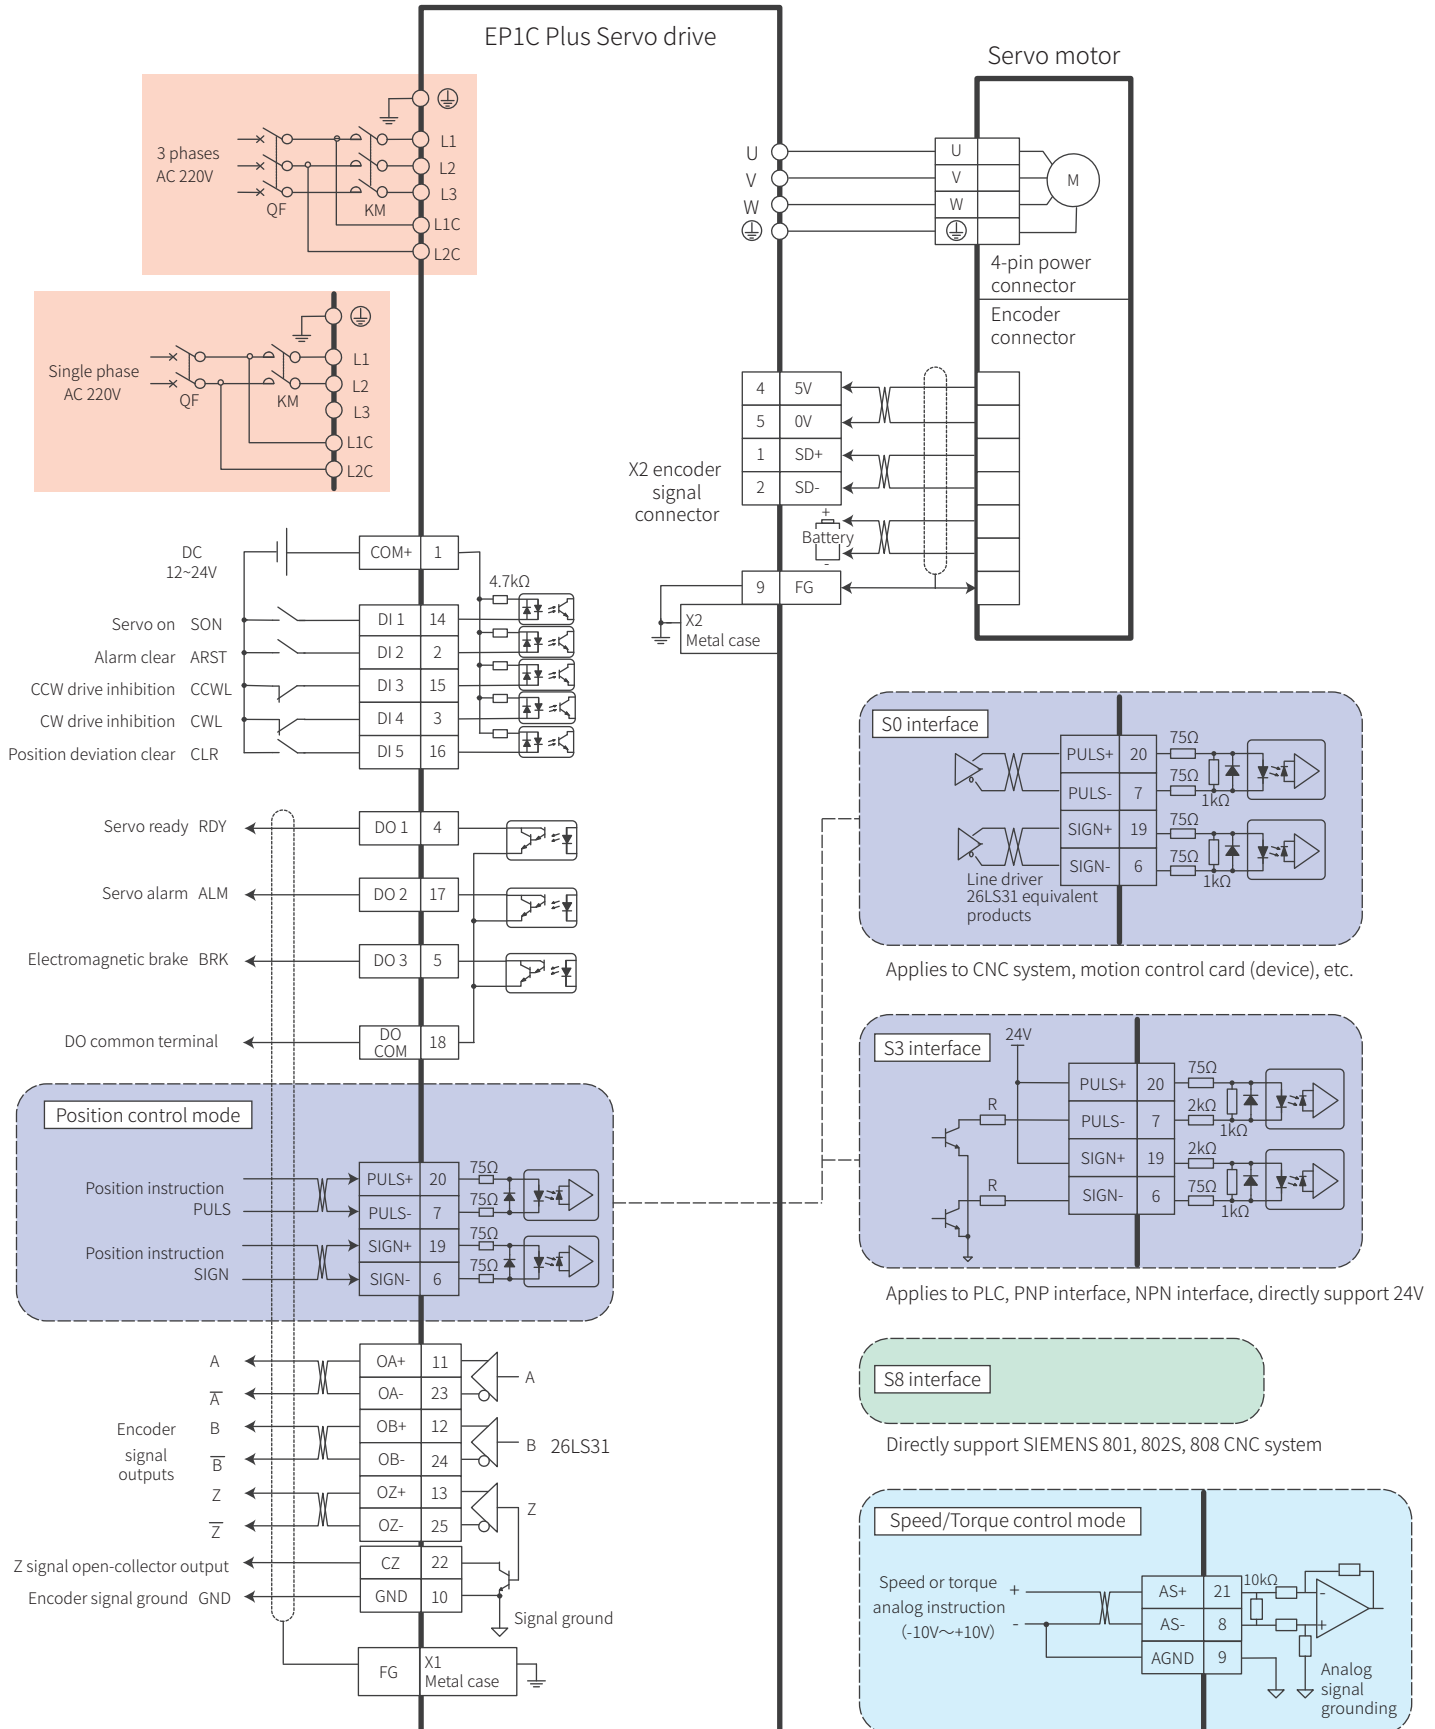


## X1 Communication Connector signal instruction

Control signal	Pin No.	function
NC	1	MECHATROLINK-II interface
DATA-	2	
DATA+	3	
HC	4	

## MECHATROLINK- II model

Take EP1C Plus -TL series (220V) as an example. For the wiring of EP1C Plus -TH series(380V) configuration, please refer to EP1C Plus MANUAL.

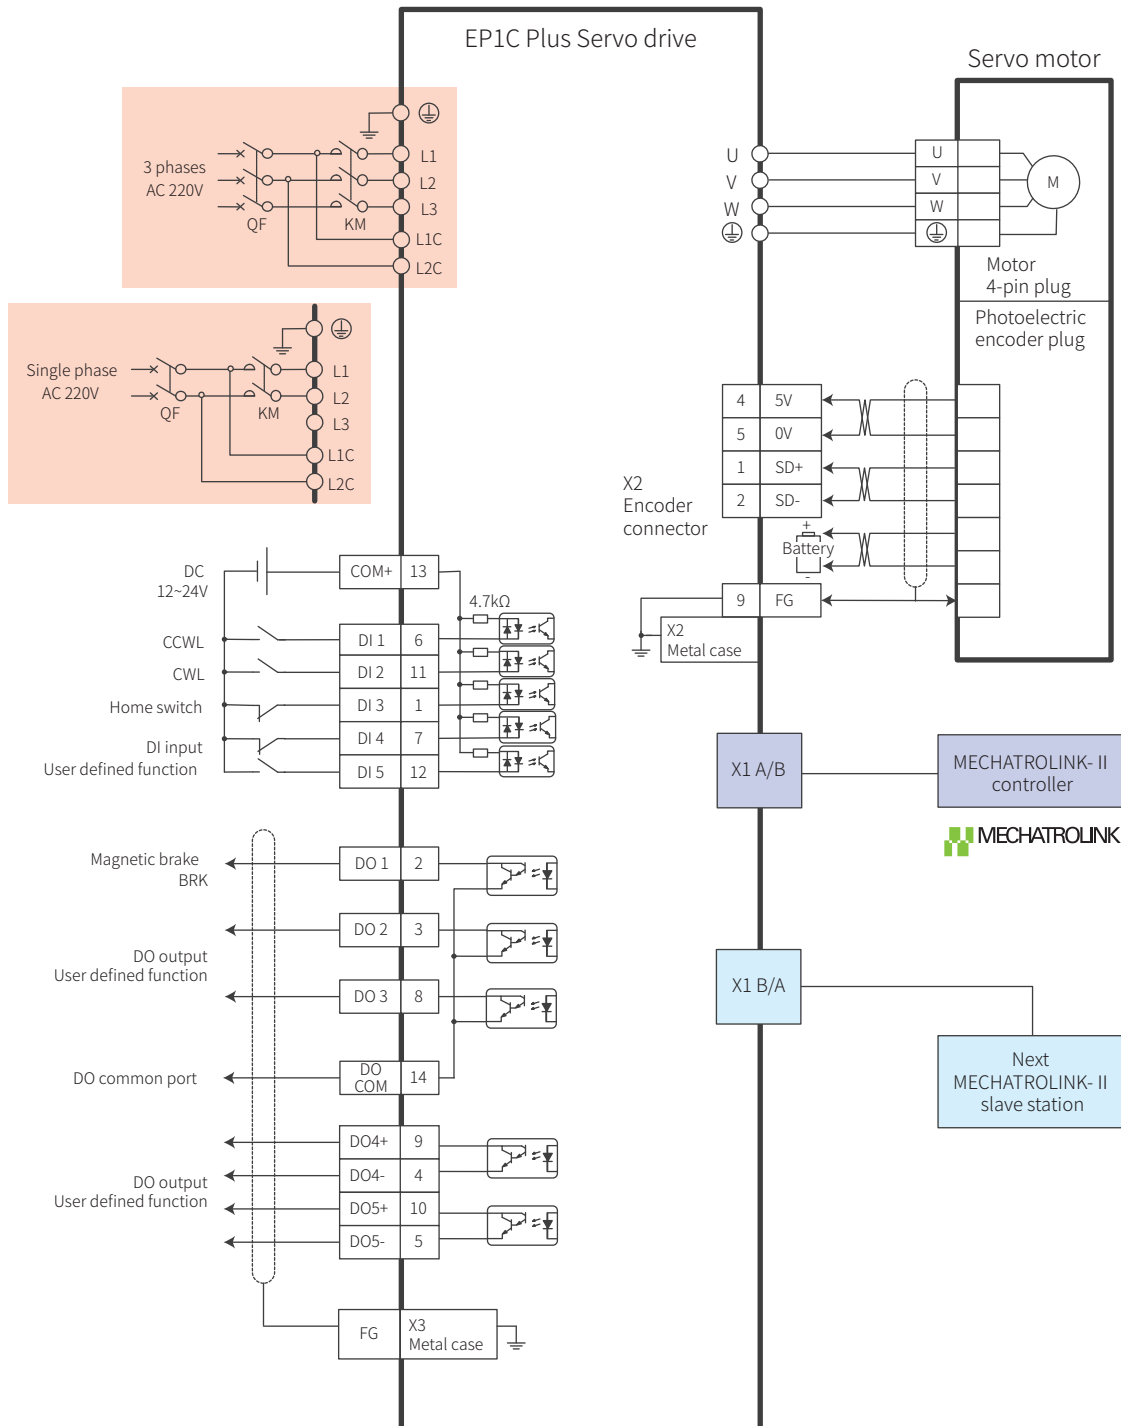

## X3 Connector input/output instruction

(reserved)

Note: For the instructions of MECHATROLINK high-voltage terminal and X2 terminal, please refer to Modbus.



# EP1C Plus Servo drive

## Technical data



EP1C Plus series		TL01	TL02	TL05	TL08	TL10	TL15	TL25	TL35	TL55	TH06	TH10	TH15	TH20	TH30	TH50	TH75	TH90	TH110	TH150	
Rated output power (kW)		0.1	0.2	0.5	0.8	1.0	1.5	2.5	3.5	5.5	0.6	1.0	1.5	2.0	3.0	5.0	7.5	9.0	11.0	15.0	
Continuous output current (Arms)		1.0	1.8	3.0	4.0	5.0	7.5	12.0	19.0	24.0	2.0	3.5	5.4	8.5	13.0	17.0	21.0	25.5	32.0	39.0	
Instantaneous maximum output current (Arms)		3.0	5.4	9.0	10.0	11.3	14.9	22.6	28.5	40.0	6.0	7.1	10.0	12.7	28.3	31.2	39.6	44.0	55.0	78.0	
Input power supply	Main power supply	Single phase AC220V -15% ~ +10% 50/60Hz			3 phase AC220V -15% ~ +10% 50/60Hz						3 phase AC380V -15% ~ +10% 50/60Hz										
	Control power supply	Single phase AC220V -15%~+10% 50/60Hz									24V DC ±15% ≥1.5A										
Environment	Temperature	Operation: 0°C~40°C      Storage: -40°C~50°C																			
	Humidity	Operation: 40%~80%(No Condensation)      Storage: less than 93% (no condensation)																			
	Atmospheric pressure	86kPa~106kPa																			
Protection rating		IP20																			
Control method		Vector control																			
Regenerative resistor		External	Internal / External optional						External	Internal / External optional						External					
Encoder feedback		Serial encoder																			
Operation mode		Position, Speed, Torque																			
Digital inputs		5 programmable input terminals (photoelectric isolation) Function: SRVON, ACLR, CW Drive inhibition, CCW Drive inhibition, CW Torque inhibition, CCW Torque inhibition, Emergency Stop, Electronic gear selection 1, electronic gear selection2, Position deviation clear, pulse input inhibition																			
Digital outputs		3 programmable input terminals (photoelectric isolation) Function: SRDY, alarm, Finish Orientation Output, Reach Speed, electro-magnetic brake, Torque restrictions																			
Encoder signal outputs		A, B, Z Differential output, Z signal open-collector output																			
Position	Input frequency	differential input: ≤1000kHz (kpps), single-ended input: ≤200kHz (kpps)																			
	Command modes	Pulse+Signal, CCW Pulse/CW Pulse, orthogonal Pulse																			
	Electronic gear ratio	1~32767 / 1~32767																			
Speed	Analog command input	-10V~+10V, Input impedance10kΩ																			
	Acceleration/-deceleration command	Parameter setting																			
	Command source	Analog																			
Torque	Analog command input	-10V~+10V, Input impedance 10kΩ																			
	Speed limit	Parameter setting																			
	Command source	Analog																			
Monitoring function		Revolving Speed, Current Position, Positional Deviation, Motor Torque, Motor Current, Instructions Pulse Frequency, busbar voltage, internal temperature of module etc.																			
Protection function		Over speed, over voltage, over current, overload, braking abnormal, encoder abnormal, position deviation and so on																			
Characteristic	Velocity frequency response	3kHz																			
	Speed fluctuation rate	<±0.03% (Load 0%~100%), <±0.02% (Power-15%~+10%)																			
	Speed ratio	1:5000																			

# EP1C Plus Servo drive

## Dimension drawing

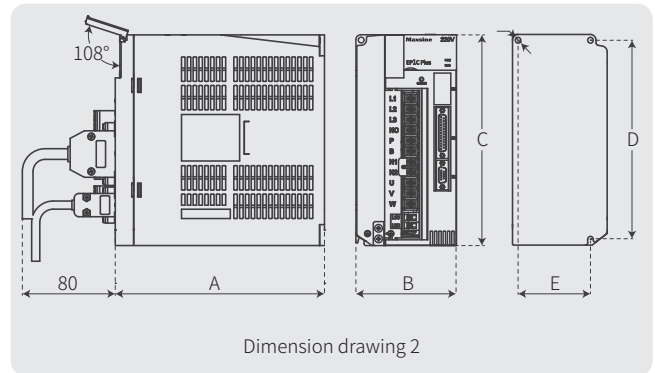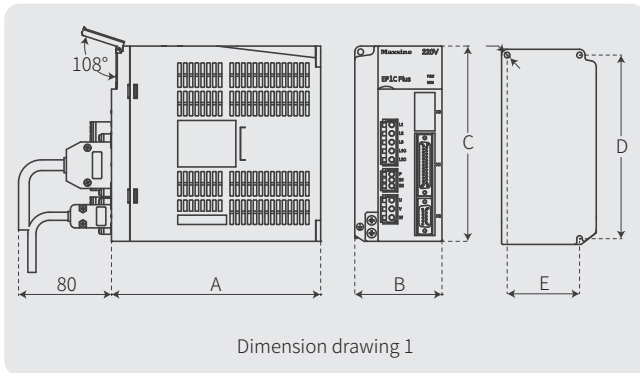


Model	Dimension drawing 1						Dimension drawing 2						
	TL01	TL02	TL05	TL08	TL10	TL15	TH06	TH10	TH15	TH20	TH30	TH50	TH75
Dimension(mm)													
A	150	150		180	180		180			180	180	210	
B	55	65		75	85		95			95	105	115	
C	168	168		168	168		168			200	220	250	
D	158	158		158	158		158			189	209	239	
E	--	55		65	65		65			84	94	104	

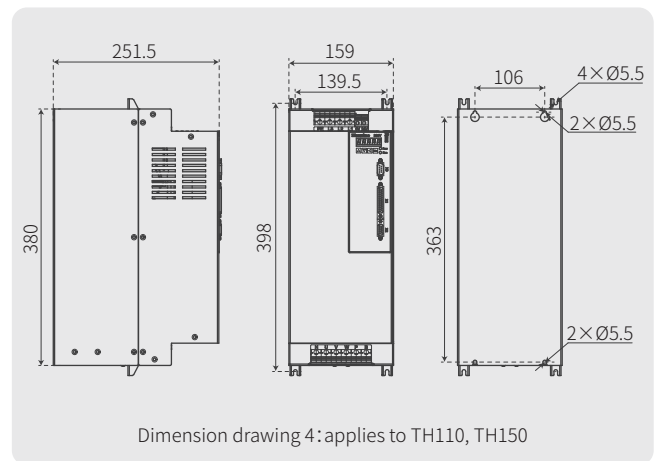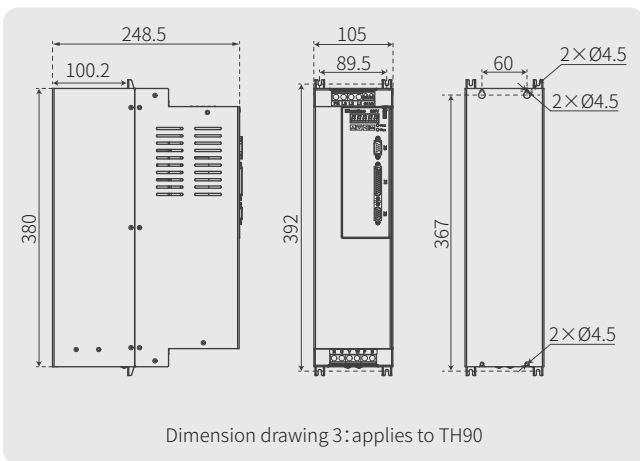

# EP3E Servo drive

## Terminal definition

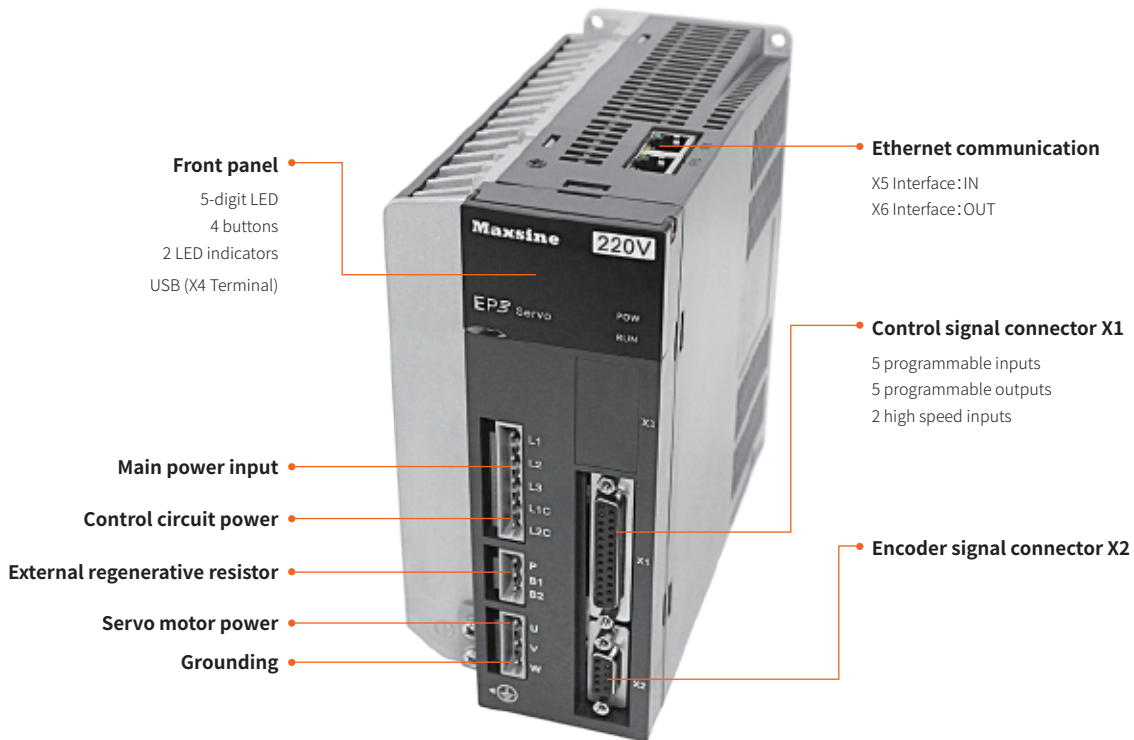

## Ethernet protocols



- Support RT, IRT communication
- Synchronous jitter time is less than 1μs
- 250μs min. communication cycle, 500μs min. synchronization cycle
- PROFIdrive: AC4 Telegram 3/5/102/105, AC3 Telegram 9/111
- Operation mode: position and speed control



- Communication protocol: CANopen over EtherCAT
- Communication cycle time: 125μs, 250μs, 500μs, 1ms, 2ms, 4ms
- Process data channel: 4R×PDO, 2T×PDO, 32bytes/PDO
- Service data channel: 1SDO
- Synchronous jitter: <1μs, DC Synchronization(SYNC0)
- Control cycle: 62.5us for current-loop, speed-loop and position-loop
- Operation mode: CSP, CSV, CST



- Communication protocol: CANopen over POWERLINK
- Communication cycle time: Multiplication of 100us
- Process data channel: 2R×PDO, 2T×PDO, 32bytes/PDO
- Service data channel: 1SDO
- Synchronous jitter: <1μs
- Control cycle: current loop 50μs, speed loop 100μs, position loop 100μs
- Operation mode: CSP, CSV, CST



- Communication protocol: MECHATROLINK-III
- Communication cycle time: 250μs
- Communication data: 32bytes or 64bytes
- Synchronous jitter: <1μs
- Control cycle: current loop 62.5μs, speed loop 125μs, position loop 125μs

# EP3E Servo drive

## Power terminals description

Name	Symbol	Model name	Detailed description
Main circuit power supply	L1, L2	GL1A0, GL1A8, GL3A0	Single-phase 220VAC -15%~+10% 50/60Hz
	L1, L2, L3	GL7A5, GL120, GL160, GL190, GL240	Three-phase 220VAC -15%~+10% 50/60Hz
	L1, L2, L3	EP3E-GH series	Three-phase 380VAC -15%~+10% 50/60Hz
Control circuit power	L1C, L2C	EP3E-GL series	Single-phase 220VAC -15%~+10% 50/60Hz
	24V, 0V	EP3E-GH series	External DC24V
Regenerative resistor	P, B1, B2	GL1A0, GL1A8, GL3A0, GL5A5, GL7A5, GL120, GL160, GH2A0, GH3A5, GH5A4	When using external regenerative resistor, disconnect B1 and B2, connect the external resistor to P and B1 ends, and let B2 be suspended
	NC, P, B	GL190, GL240, GH8A5, GH130, GH170, GH210, GH260, GH320, GH390	When using the external regenerative resistor, the internal regenerative resistor line between P and B should be disconnected, and connect the 2 internal regenerative resistor line to NC. Then crossover the external regenerative resistor to terminals P and B
DC reactor	N1, N2	GL190, GL240, EP3E-GH series	Connect the DC reactor between N1 and N2 for harmonic suppression
Motor power	U	EP3E full range	Output to motor U phase power
	V		Output to motor V phase power
	W		Output to motor W phase power
Grounding		EP3E full range	Motor casting grounding terminals
			Drive grounding terminals

## X1 Connector signal instruction

Control signal terminal name	Pin No.	Function	
Inputs	DI1	14	
	DI2	2	
	DI3	15	
	DI4	3	
	DI5	16	
	COM+	1	DI power supply (DC12V~24V)
Outputs	DO1	4	
	DO2	17	
	DO3	5	
	DOCOM	18	DO common port
	DO4+	11	
	DO4-	23	
	DO5+	12	
	DO5-	24	
Latch inputs	HDI1+	20	
	HDI1-	7	
	HDI2+	19	
	HDI2-	6	
Shielding wire protection	Plug with metal case	Shielded wires for connecting shielded cable	

## X2 Connector signal instruction

Encoder signal name	Pin No.		Function
	Absolute type	Incremental type	
Encoder power supply	5V	4	Use 5VDC power supply (provided by servo driver). If the cable is longer than 20m, in order to prevent encoder from voltage drop down, it is better to use multi wire or thick wire for power line and ground line
	0V	5	
Signal input	SD+	1	Connect to absolute encoder signal output
	SD-	2	
Shielding wire protection	FG	9	Connected to signal cable shielding line


## X5(input) and X6(output) Interface

RJ45	Pin No.	Function
TX+	1	Send signal+
TX-	2	Send signal-
RX+	3	Receive signal+
RX-	6	Receive signal-




## POWERLINK/MECHATROLINK-III model

Take the GL series of EP3E as an example. Please refer to the product user manual for other products wiring.

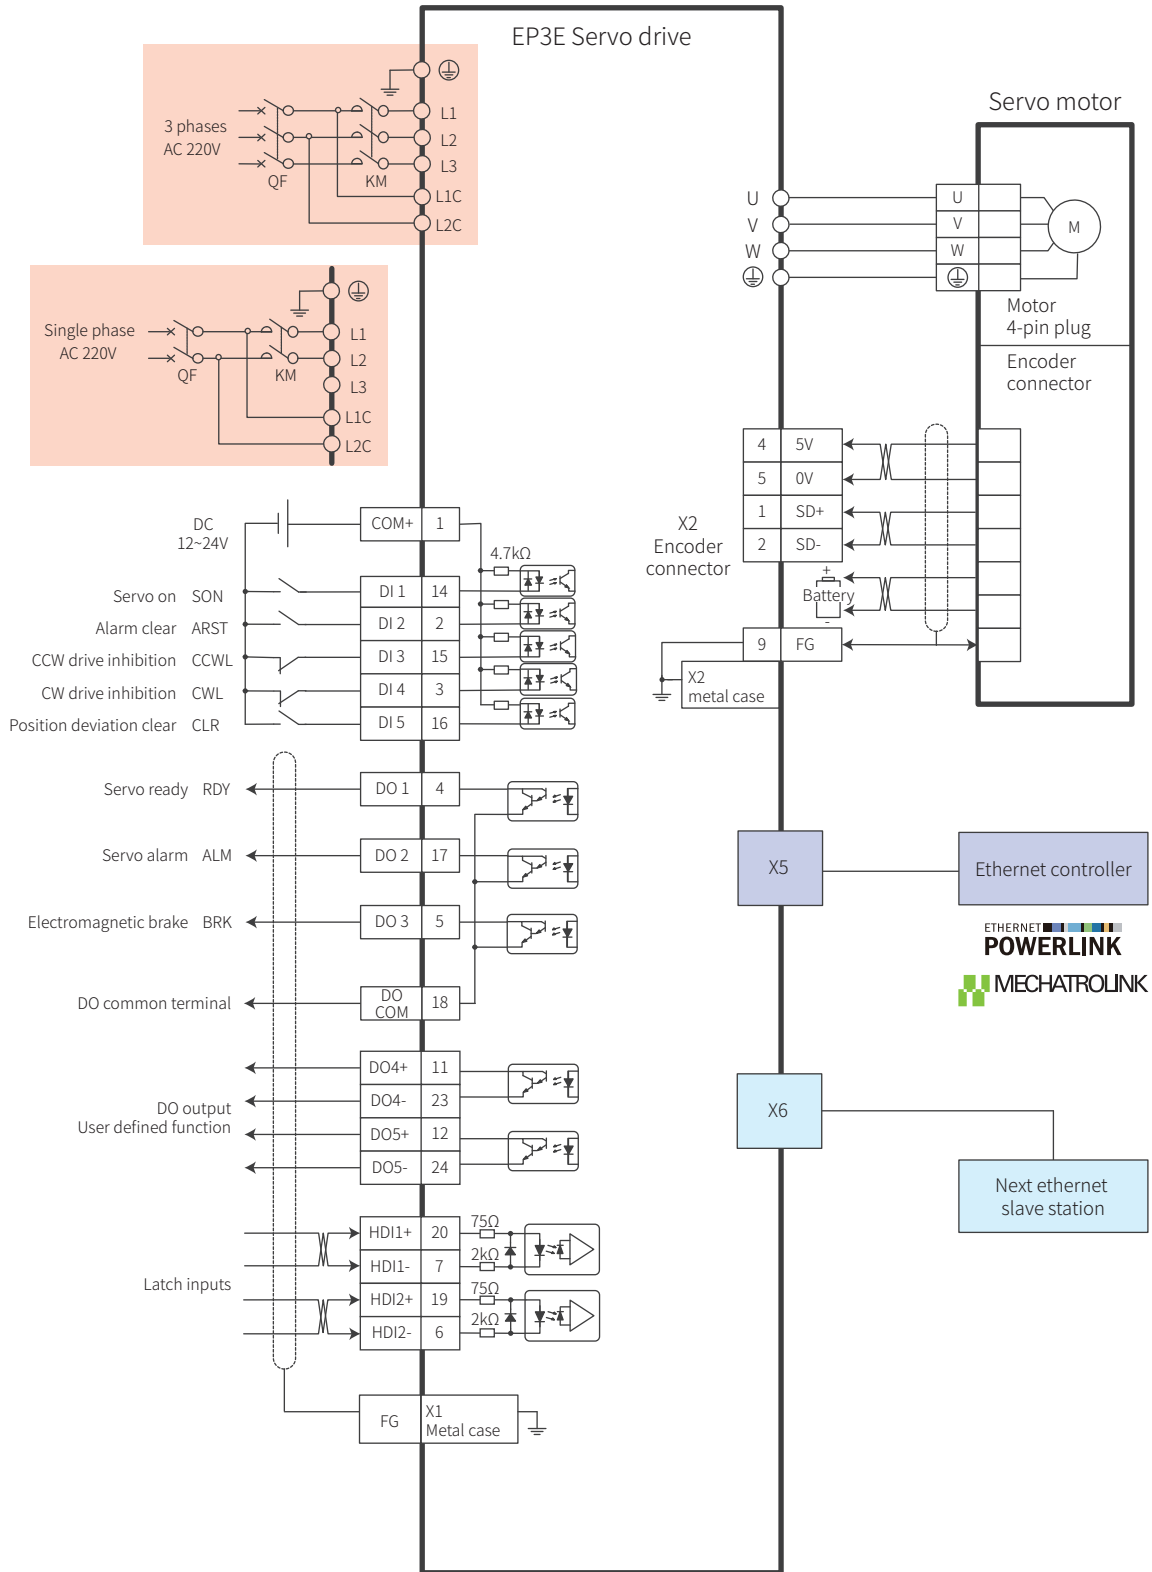

## PROFINET/EtherCAT model

Take the GL series of EP3E as an example. Please refer to the product user manual for other products wiring.

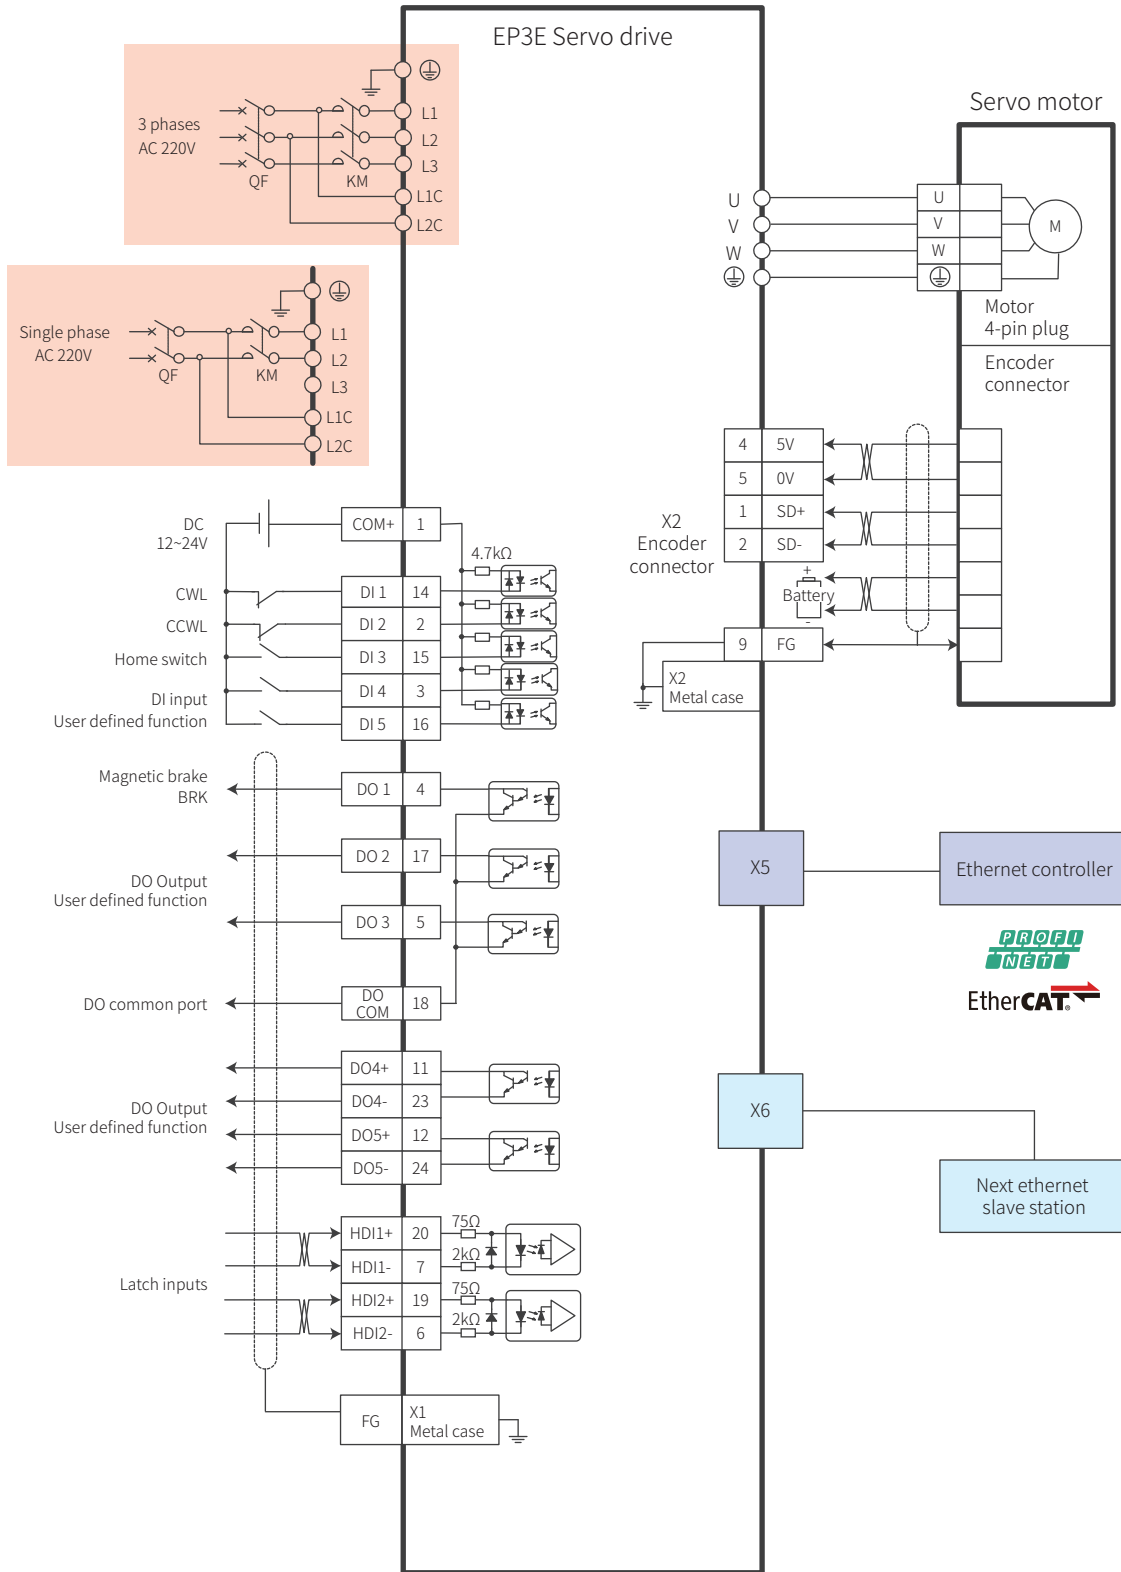


# EP3E Servo drive

## Technical data

EP3E series		GL1A0	GL1A8	GL3A0	GL5A5	GL7A5	GL120	GL160	GL190	GL240	GH2A0	GH3A5	GH5A4	GH8A5	GH130	GH170	GH210	GH260	GH320	GH390	
Rated output power (kW)		0.1	0.2	0.5	1.0	1.5	2.0	2.5	3.5	5.5	0.6	1.0	1.5	2.0	3.0	5.0	7.5	9.0	110	15.0	
Continuous output current (Arms)		1.0	1.8	3.0	5.0	7.5	11.5	15.5	19.0	24.0	2.0	3.5	5.4	8.5	13.0	17.0	21.0	25.5	32.0	39.0	
Instantaneous maximum output current (Arms)		3.0	5.4	9.0	11.3	14.9	21.0	24.5	28.5	40.0	6.0	7.1	10.0	12.7	28.3	31.2	39.6	44.0	55.0	78.0	
Input power supply	Main power supply	Single phase AC220V -15% ~ +10% 50/60Hz			3 phase AC220V -15% ~ +10% 50/60Hz						3 phase AC380V -15% ~ +10% 50/60Hz										
	Control power supply	Single phase AC220V -15%~+10% 50/60Hz									24V DC ±15% ≥1.5A										
Environment	Temperature	Operation: 0°C~40°C      Storage: -40°C~50°C																			
	Humidity	Operation: 40%~80%(no condensation)									Storage: less than 93% (no condensation)										
	Atmospheric pressure	86kPa~106kPa																			
Protection rating		IP20																			
Control method		Vector control																			
Regenerative resistor		External	Internal / External optional						External	Internal / External optional						External					
Feedback mode		Serial encoder																			
Operation mode		Cyclic Synchronous Position Mode (CSP), Cyclic Synchronous Velocity Mode (CSV), Cyclic Synchronous Torque Mode (CST) For more details, please refer to the user manual.																			
Digital inputs		5 programmable input terminals (photoelectric isolation), 2 high speed optocoupler input																			
Digital outputs		5 programmable input terminals (photoelectric isolation)																			
Special function		Mechanical resonance notch filter, vibration suppression																			
Monitoring function		Speed, current position, position deviation, motor torque, motor current, instruction pulse frequency, etc																			
Protection function		Over speed, over voltage, over current, overload, braking abnormal, encoder abnormal, position deviation and so on																			
Characteristic	Velocity frequency response	3kHz																			
	Speed fluctuation rate	< ±0.03% (Load 0%~100%), < ±0.02% (Power-15%~+10%)																			
	Speed ratio	1 : 5000																			



# EP3E Servo drive

## Dimension drawing

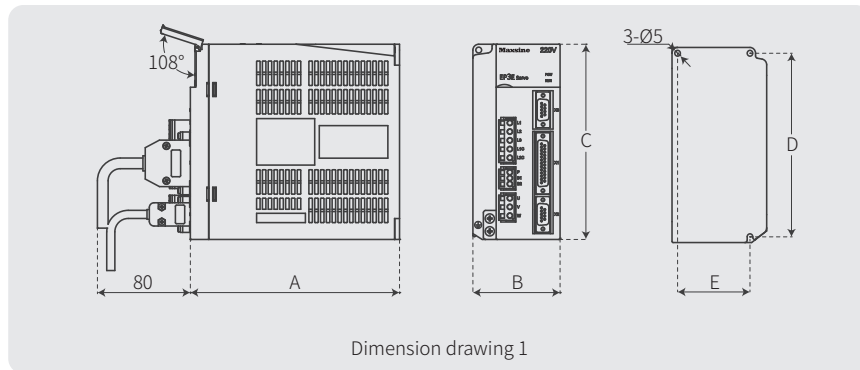

Model Dimension(mm)	GL1A0	GL1A8/GL3A0	GL5A5	GL7A5	GL120	GL160	GL190	GL240
A	150	150	180	180	180	180	180	210
B	55	65	75	85	95	95	105	115
C	168	168	168	168	168	200	220	250
D	158	158	158	158	158	189	209	239
E	--	55	65	65	65	84	94	104

Model Dimension(mm)	GH2A0/GH3A5/GH5A4	GH8A5	GH130	GH170/GH210
A	180	180	180	210
B	95	95	105	115
C	168	200	220	250
D	158	189	209	239
E	65	84	94	104

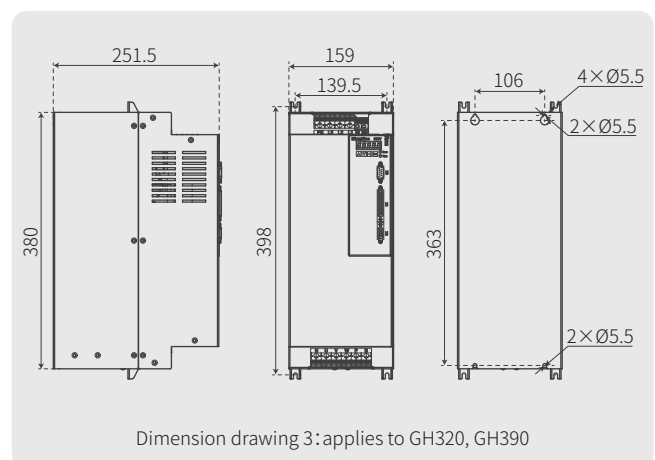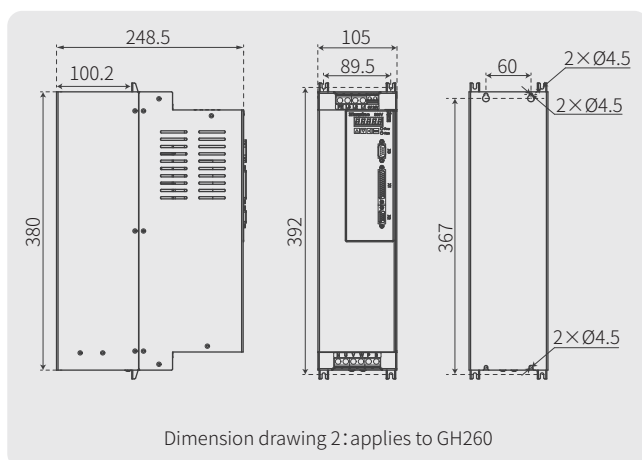

# Order number description

## EP1C Servo drive

EP1C - T L 05 - F0 S0 M

① ② ③ ④ ⑤



①

Symbol	Main power supply voltage
L	AC220V
H	AC380V

②

TL series	Rated power	TH series	Rated power
01	0.1kW	06	0.6kW
02	0.2kW	10	1.0kW
05	0.5kW	15	1.5kW
08	0.8kW	20	2.0kW
10	1.0kW	30	3.0kW
15	1.5kW	50	5.0kW
25	2.5kW	75	7.5kW
35	3.5kW	90	9.0kW
55	5.5kW	110	11.0kW
		150	15.0kW

③

Symbol	Encoder
F0	Incremental encoder

④

Symbol	Control mode
S0	Standard 5V differential signal input
S8	Special specifications for SIEMENS CNC

⑤

Symbol	Communication protocol
M	Modbus

## EP1C Plus Servo drive

EP1C Plus - T L 05 - E3 S0 M

① ② ③ ④ ⑤


①

Symbol	Main power supply voltage
L	AC220V
H	AC380V

②

TL series	Rated power	TH series	Rated power
01	0.1kW	06	0.6kW
02	0.2kW	10	1.0kW
05	0.5kW	15	1.5kW
08	0.8kW	20	2.0kW
10	1.0kW	30	3.0kW
15	1.5kW	50	5.0kW
25	2.5kW	75	7.5kW
35	3.5kW	90	9.0kW
55	5.5kW	110	11.0kW
		150	15.0kW

Note: EP1C Plus supports Modbus and MECHATROLINK-II protocols. Please refer to the right for definitions of ③④⑤ of both protocols.



③


Symbol	Encoder
B0	serial INC encoder
E3	serial ABS encoder

④

Symbol	Control mode
S0	Standard 5V differential signal input
S3	Standard 24V single ended signal input
S8	Special specifications for SIEMENS CNC

⑤

Symbol	Communication protocol
M	Modbus



③

Symbol	Encoder
B0	serial INC encoder
E3	serial ABS encoder

④

Symbol	Control mode
S0	X3 control terminal DB15

⑤

Symbol	Communication protocol
M2	MECHATROLINK

# Order number description

■ EP3E Servo drive

**EP3E - G L 1A0 - E3 S0 EP**

① ② ③ ④ ⑤



①

Symbol	Main power supply voltage
L	AC220V
H	AC380V

②

GL series	Rated power	GH series	Rated power
1A0	0.1kW	2A0	0.6kW
1A8	0.2kW	3A5	1.0kW
3A0	0.5kW	5A4	1.5kW
5A5	1.0kW	8A5	2.0kW
7A5	1.5kW	130	3.0kW
120	2.0kW	170	5.0kW
160	2.5kW	210	7.5kW
190	3.5kW	260	9.0kW
240	5.5kW	320	11.0kW
		390	15.0kW

③

Symbol	Encoder
B0	serial INC encoder
E3	serial ABS encoder

④

Symbol	Control mode
S0	X1 control terminal DB25

⑤

Symbol	Communication protocol
EP	ETHERNET <b>POWERLINK</b>
EC	<b>EtherCAT</b>
M3	<b>MECHATROLINK</b>
PN	<b>PROFINET</b>
...	Please contact us for customization

# Order number description

■ Servo motor

**110 MA L 040 30 B N O 1 Y1**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



①

Symbol	The base number
040	40mm
060	60mm
080	80mm
110	110mm
130	130mm
180	180mm

②

Symbol	Model
MS	MS series
MA	MA series
GS	GS series
GA	GA series
BS	BS series
BA	BA series

③

Symbol	Voltage
L	AC 220V
H	AC 380V

④

Symbol	Rated torque	Symbol	Rated torque
003	0.32 N·m	084	8.34 N·m
006	0.64 N·m	096	9.55 N·m
013	1.27 N·m	100	10.00 N·m
024	2.39 N·m	115	11.50 N·m
032	3.18 N·m	143	14.30 N·m
040	4.00 N·m	150	15.00 N·m
048	4.77 N·m	190	19.00 N·m
050	5.00 N·m	270	27.00 N·m
054	5.39 N·m	350	35.00 N·m
060	6.00 N·m	480	48.00 N·m
077	7.70 N·m		

⑤

Symbol	Rated speed
15	1500rpm
20	2000rpm
25	2500rpm
30	3000rpm

⑥

Symbol	Encoder
F	Standard INC encoder
R	Resolver
C	17bit Multi-turn ABS
D	17bit Single-turn ABS
M	23bit Multi-turn ABS
B	23bit Single-turn ABS
P	25bit Multi-turn ABS

⑦

Symbol	Brake
N	Without brake
Z	With brake

⑧

Symbol	Model
O	Circular shaft
A	Closed key
C	Forelock key

⑨

Symbol	Model
1	Default
2	Customized

⑩

Symbol	Model		
Y1	plug of 60 & 80 motors	M series	4 cores round metal plug
Y2			4 cores waterproof plug
Y3		G/B series	6 cores waterproof plug
Y4			6 cores round metal plug
A [Note]	AMP connector		
H [Note]	Aviation plug		
J [Note]	Military plug		

Note: "A" represents the standard plug of 40, 60, and 80 series motors; "H" represents the standard plug of 110, 130, and 180 series motors; "J" represents the military plug of 110, 130, and 180 series motors.

# Overview of servo motor

Motor model	Rated power kW	Rated torque N·m	Peak torque N·m	Rated speed rpm	Peak speed rpm	Rated current A	Peak current A	Line-Line Resistance 25°C Ω	Line-Line Inductance mH	Inertia with brake ×10 <sup>-3</sup> kg·m <sup>2</sup>	Encoder selection
<b>GS series 220V</b>											
060GSL00630	0.20	0.64	1.92	3000	6000	1.6	4.8	4.05	10.54	0.033(0.034)	C D M B
060GSL01330	0.40	1.27	3.81	3000	6000	2.8	8.4	2.08	6.16	0.056(0.057)	C D M B
080GSL01330	0.40	1.27	3.81	3000	6000	2.5	7.5	1.22	6.1	0.104(0.105)	C D M B
080GSL02430	0.75	2.39	7.17	3000	6000	4.4	13.2	0.82	5.95	0.163(0.164)	C D M B
110GSL04030	1.26	4.00	12.00	3000	4000	6.0	18.0	0.46	3.6	0.56(0.58)	F R C D M B
110GSL06025	1.57	6.00	18.00	2500	4000	8.7	26.1	0.26	2.39	0.85(0.87)	F R C D M B
130GSL04025	1.00	4.00	12.00	2500	4000	5.8	17.4	0.56	3.72	1.14(1.3)	F R C D M B
130GSL04820	1.00	4.77	14.31	2000	4000	6.6	19.8	0.56	3.72	1.14(1.3)	F R C D M B
130GSL05025	1.30	5.00	15.00	2500	4000	6.9	20.7	0.56	3.72	1.14(1.3)	F R C D M B
130GSL05415	0.85	5.39	16.17	1500	3000	6.7	13.5	0.56	3.72	1.14(1.3)	F R C D M B
130GSL06025	1.57	6.00	18.00	2500	4000	7.7	23.1	0.34	2.56	1.7(1.85)	F R C D M B
130GSL07725	2.00	7.70	23.10	2500	4000	10.0	30.0	0.34	2.56	1.7(1.85)	F R C D M B
130GSL08315	1.30	8.34	25.02	1500	3000	9.9	31.8	0.34	2.56	1.7(1.85)	F R C D M B
130GSL10025	2.60	10.00	30.00	2500	4000	15.0	45.0	0.29	2.35	2.32(2.47)	F R C D M B
130GSL11515	1.80	11.50	34.50	1500	3000	12.0	37.8	0.29	2.35	2.32(2.47)	F R C D M B
130GSL15015	2.36	15.00	40.20	1500	3000	14.7	38.4	0.2	1.86	3.18(3.33)	F R C D M B
<b>GS series 380V</b>											
110GSH04025	1.05	4.00	12.00	2500	4000	3.3	18.0	1.38	11.7	0.56(0.58)	F R C D M B
110GSH06025	1.57	6.00	18.00	2500	4000	4.5	9.9	0.95	8.9	0.85(0.87)	F R C D M B
<b>GA series 220V</b>											
110GAL04020	0.84	4.00	12.00	2000	3000	4.4	13.2	0.75	5.87	0.56(0.58)	F R C D M B
110GAL06020	1.26	6.00	18.00	2000	3000	6.4	19.2	0.48	4.16	0.85(0.87)	F R C D M B
130GAL05415	0.85	5.39	16.17	1500	2000	5.1	15.0	0.98	6.4	1.14(1.3)	F R C D M B
130GAL08315	1.30	8.34	25.02	1500	2000	6.4	19.2	0.78	6.0	1.7(1.85)	F R C D M B
130GAL10015	1.57	10.00	30.00	1500	2000	6.4	19.2	0.68	6.3	2.32(2.47)	F R C D M B
130GAL11515	1.80	11.50	34.50	1500	2000	7.4	22.2	0.68	6.3	2.32(2.47)	F R C D M B
130GAL15015	2.36	15.00	45.00	1500	2000	9.5	28.5	0.48	4.41	3.18(3.33)	F R C D M B
<b>GA series 380V</b>											
130GAH04025	1.00	4.00	12.00	2500	3000	2.4	7.2	2.6	18.4	1.14(1.3)	F R C D M B
130GAH04820	1.00	4.77	14.31	2000	3000	2.8	8.4	2.6	18.4	1.14(1.3)	F R C D M B
130GAH05025	1.30	5.00	15.00	2500	3000	2.9	8.7	2.6	18.4	1.14(1.3)	F R C D M B
130GAH05415	0.85	5.39	16.17	1500	3000	3.1	9.3	2.6	18.4	1.14(1.3)	F R C D M B
130GAH06025	1.57	6.00	18.00	2500	3000	4.1	12.3	1.4	10.3	1.7(1.85)	F R C D M B
130GAH07725	2.02	7.70	23.10	2500	3000	5.0	15.0	1.4	10.3	1.7(1.85)	F R C D M B
130GAH08315	1.30	8.34	25.02	1500	3000	4.9	14.7	1.4	10.3	1.7(1.85)	F R C D M B
130GAH10015	1.57	10.00	30.00	1500	2000	3.9	11.7	2.0	17.0	2.32(2.47)	F R C D M B
130GAH10025	2.67	10.00	30.00	2500	3000	5.4	16.2	1.0	8.7	2.32(2.47)	F R C D M B
130GAH11515	1.80	11.50	34.50	1500	2000	4.3	12.9	2.0	17.0	2.32(2.47)	F R C D M B
130GAH15015	2.36	15.00	45.00	1500	2000	6.6	19.8	0.9	8.9	3.18(3.33)	F R C D M B
<b>MS series 220V</b>											
040MSL00330	0.10	0.32	0.96	3000	5000	1.1	3.0	9.28	8.8	0.0035(0.052)	F M
060MSL00630	0.20	0.64	1.92	3000	6000	1.9	5.7	7.42	2.56	0.017(0.019)	F R M B
060MSL01330	0.40	1.27	3.81	3000	6000	2.9	8.7	6.2	1.75	0.027(0.03)	F R M B
080MSL01330	0.40	1.27	3.81	3000	6000	2.6	7.8	1.22	6.1	0.068(0.073)	F R M B
080MSL02430	0.75	2.39	7.17	3000	6000	5.3	15.9	0.44	2.46	0.113(0.118)	F R M B
080MSL03230	1.00	3.18	9.54	3000	6000	6.9	20.7	0.44	2.43	0.113(0.118)	F R M B
130MSL04025	1.00	4.00	12.00	2500	4000	5.1	15.3	0.53	4.4	0.48(0.58)	F R M B
130MSL04820	1.00	4.77	14.31	2000	4000	5.8	17.4	0.53	4.4	0.48(0.58)	F R M B
130MSL05025	1.30	5.00	15.00	2500	4000	6.1	18.3	0.53	4.4	0.48(0.58)	F R M B
130MSL09620	2.00	9.55	28.65	2000	4000	11.3	33.9	0.2	2.2	0.94(0.97)	F R M B
130MSL10025	2.60	10.00	30.00	2500	4000	11.5	34.5	0.2	2.2	0.94(0.97)	F R M B
130MSL14320	3.00	14.30	42.90	2000	3500	14.0	42.3	0.15	1.9	1.41(1.44)	F R M B



## Overview of servo motor


Motor model	Rated power kW	Rated torque N·m	Peak torque N·m	Rated speed rpm	Peak speed rpm	Rated current A	Peak current A	Line-Line Resistance 25°C Ω	Line-Line Inductance mH	Inertia with brake ×10 <sup>-3</sup> kg·m <sup>2</sup>	Encoder selection
<b>MA series 220V</b>											
110MAL04030	1.26	4.00	12.00	3000	4000	5.5	16.5	0.44	4.84	0.31(0.33)	F R M B
110MAL06030	1.88	6.00	18.00	3000	3500	6.8	20.4	0.33	3.99	0.5(0.52)	F R M B
130MAL06025	1.57	6.00	18.00	2500	3000	6.4	19.2	0.4	5.0	0.65(0.68)	F R M B
130MAL07725	2.02	7.70	23.10	2500	3000	7.7	23.0	0.31	4.1	0.83(0.86)	F R M B
130MAL10015	1.57	10.00	30.00	1500	2000	6.9	20.7	0.55	7.1	0.94(0.97)	F R M B
130MAL15015	2.36	15.00	45.00	1500	2000	9.5	27.0	0.37	5.3	1.41(1.44)	F R M B
<b>MA series 380V</b>											
110MAH04030	1.26	4.00	12.00	3000	5500	4.0	12.0	0.92	9.9	0.31(0.33)	F R M B
110MAH06030	1.88	6.00	18.00	3000	4000	4.8	14.4	0.85	10.6	0.5(0.52)	F R M B
130MAH04025	1.00	4.00	12.00	2500	4500	2.7	8.1	1.4	15.2	0.48(0.58)	F R M B
130MAH04820	1.00	4.77	14.30	2000	4500	3.4	10.2	1.4	15.2	0.48(0.58)	F R M B
130MAH05025	1.30	5.00	15.00	2500	4500	3.7	11.1	1.4	15.2	0.48(0.58)	F R M B
130MAH06025	1.57	6.00	18.00	2500	4000	4.1	12.3	0.94	10.7	0.65(0.68)	F R M B
130MAH07725	2.02	7.70	23.10	2500	4000	5.0	15.0	0.74	9.0	0.83(0.86)	F R M B
130MAH10015	1.57	10.00	30.00	1500	2500	4.3	12.9	1.37	18.0	0.94(0.97)	F R M B
130MAH15015	2.36	15.00	45.00	1500	2500	6.2	18.6	0.85	12.0	1.41(1.44)	F R M B
180MAH19015	3.00	19.00	57.00	1500	1800	7.8	23.4	0.81	6.42	6.5(6.7)	F R M B
180MAH27015	4.30	27.00	81.00	1500	1800	10.0	30.0	0.67	5.5	9.1(9.3)	F R M B
180MAH35015	5.50	35.00	105.00	1500	1800	13.6	40.8	0.4	3.5	11.8(12.0)	F R M B
180MAH48015	7.50	48.00	144.00	1500	1800	17.5	52.5	0.24	2.55	15.8(16.0)	F R M B

# Cables

## Encoder cable


MS/MA 40/60/80 series motors

E□□□-DB09B0A09/Y109/Y209




MS/MA 110/130/180 series motors


E□□□-DB09B0H15



E□□□-DB09E0A09/Y109/Y209

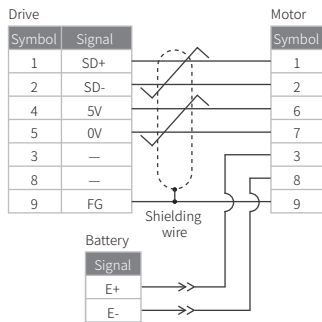

E□□□-DB09E0H15

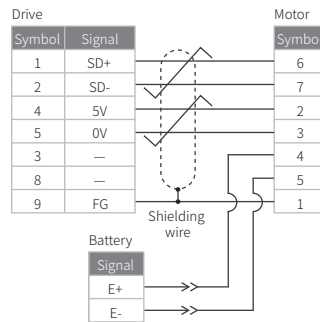


Note: SD+ and SD- are twisted pair. 0V and 5V are twisted pair.

## Power cable


MS/MA 60/80 series motors

P□□□-04075A04/Y104/Y204




MS/MA 110/130 series motors

P□□□-04□□□H04



MS/MA 180 series motors


P□□□-04□□□H04B



## Brake cable


MS/MA 60/80 series motors

B□□□-02050A02



MS/MA 110/130/180 series motors

B□□□-02050H03



# Order number for cables

## P □□□ - 04 075 A04 R

① ② ③ ④ ⑤ ⑥

Symbol	Cable type
P	Power cable
B	Brake cable
BP	Power and brake cable

Symbol	Cable length
030	3m
050	5m
070	7m
100	10m

Symbol	Cable core	Motor type					
		40	60	80	110	130	180
02	2 cores brake cable	✓	✓	✓	✓	✓	✓
04	4 cores power cable	✓	✓	✓	✓	✓	✓
06	6 cores power and brake cable	✓	✓	✓			

Symbol	Cable diameter
050	0.50mm <sup>2</sup>
075	0.75mm <sup>2</sup>
150	1.50mm <sup>2</sup>
250	2.50mm <sup>2</sup>
400	4.00mm <sup>2</sup>
600	6.00mm <sup>2</sup>

Symbol	Motor power/Brake plug	Type	Motor type					
			40	60	80	110	130	180
A02	2 cores AMP plug	B	✓	✓				
A04	4 cores AMP plug	P	✓	✓				
A06	6 cores AMP plug	BP	✓					
Y102	2 cores round metal plug	B	✓	✓				
Y202	2 cores waterproof plug	B	✓	✓				
Y104	4 cores round metal plug	P	✓	✓				
Y204	4 cores waterproof plug	P	✓	✓				
Y306	6 cores waterproof plug	BP	✓	✓				
Y406	6 cores round metal plug	BP			✓	✓		
H03	3 cores aviation plug	B			✓	✓	✓	
H04	4 cores aviation plug	P			✓	✓	✓	
H04B	4 cores aviation plug	P					✓	

Symbol	Specification
R	Flexible cable

## C □□□ - EP1C DB25 S/808DN R

① ② ③ ④ ⑤ ⑥

Symbol	Cable type
C	Control cable

Symbol	Cable length
030	3m
050	5m
070	7m
100	10m

③ Adaptable servo drive series

Symbol	Servo drive control plug
DB25	Servo drive control plug DB25
DB44	Servo drive control plug DB44
S361	Servo drive control plug DS361

Symbol	PLC/CNC system/Motion controller
S/808DN	Siemens 808DCNC system <sup>1</sup> (with no brake control)
MAX/16	Standard 16 cores speed /torque control
MAX/10	Standard 10 cores position control

Symbol	Specification
R	Flexible cable

## E □□□ - DB09 □□ A09 R

① ② ③ ④ ⑤ ⑥

Symbol	Cable type
E	Encoder cable

Symbol	Cable length
030	3m
050	5m
070	7m
100	10m

Symbol	Servo drive encoder connector
DB09	Absolute type
DB09	Resolver
DB15	Incremental type/Fewer lines type
S261	S261 encoder type

Symbol	Encoder specification
F0	Standard INC encoder
B0	Single-turn ABS encoder
E0	Multi-turn ABS encoder
R0	Resolver encoder

Symbol	Servo motor encoder connector	Motor type					
		40	60	80	110	130	180
Y109	9 cores round metal plug	✓	✓				
Y209	9 cores waterproof plug	✓	✓				
Y309	9 cores waterproof plug	✓	✓				
Y409	9 cores round metal plug	✓	✓				
Y115	15 cores round plug	✓	✓				
A09	9 cores AMP plug	✓	✓	✓			
A15	15 cores AMP plug	✓	✓				
H15	15 cores aviation plug				✓	✓	✓
H07	For special use						
H09	For special use						

Symbol	Specification
R	Flexible cable

## L □□□ - ETH

① ② ③

Symbol	Cable type
L	Communication cable

Symbol	Cable length
003	0.3m (standard length)
010	1.0m
030	3.0m
050	5.0m
100	10.0m

Symbol	Specification	Communication protocol				
		EC	PN	EP	M3	M2
ETH	Double RJ45 plug	✓	✓	✓		
M3	Double RJ45 plug				✓	
M2	Double M-II USB plug					✓

### Please note:

EC represents EtherCAT, PN represents ProfiNet, EP represents powerlink, M3 represents Mechatrolink-III, M2 represents represents Mechatrolink-II

## L\_M2D

L□□□-M2 cable plug



# Combinations of motors(220V), EP1C and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-4</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable
<b>MSL series</b>									
040MSL00330	0.32	3000 (5000)	0.10	1.10	0.0035	TL01	P□□□-04075A04	E□□□-DB15E0A09	BP□□□-06075A06
060MSL00630	0.64	3000 (6000)	0.20	1.90	0.017	TL02	AMP Plug P□□□-04075A04  Round plug P□□□-04075Y104 P□□□-04075Y204	AMP Plug E□□□-DB15□□A09  Round plug E□□□-DB15□□Y109 E□□□-DB15□□Y209	AMP Plug B□□□-02050A02  Round plug B□□□-02050Y102 B□□□-02050Y202
060MSL01330	1.27	3000 (6000)	0.40	2.90	0.027	TL05			
080MSL01330	1.27	3000 (6000)	0.40	2.60	0.068	TL05			
080MSL02430	2.39	3000 (6000)	0.75	5.30	0.113	TL10、TL15			
080MSL03230	3.18	3000 (6000)	1.00	6.90	0.113	TL10、TL15			
130MSL04025	4.00	2500 (4000)	1.00	5.10	0.48	TL10、TL15	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03
130MSL04820	4.77	2000 (4000)	1.00	5.80	0.48	TL10、TL15			
130MSL05025	5.00	2500 (4000)	1.30	6.10	0.48	TL15			
130MSL09620	9.55	2000 (4000)	2.00	11.30	0.94	TL25			
130MSL10025	10.00	2500 (4000)	2.60	11.50	0.94	TL25、TL35			
130MSL14320	14.30	2000 (3500)	3.00	14.10	1.41	TL35	P□□□-04250H04		
<b>MAL series</b>									
110MAL04030	4.00	3000 (4000)	1.26	5.50	0.31	TL10、TL15	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03
110MAL06030	6.00	3000 (3500)	1.88	6.80	0.50	TL15、TL25			
130MAL06025	6.00	2500 (3000)	1.57	6.40	0.65	TL15、TL25			
130MAL07725	7.70	2500 (3000)	2.02	7.70	0.83	TL15、TL25			
130MAL10015	10.00	1500 (2000)	1.57	6.90	0.94	TL15、TL25			
130MAL15015	15.00	1500 (2000)	2.36	9.50	1.41	TL25、TL35			
<b>GSL series</b>									
060GSL00630	0.64	3000 (6000)	0.20	1.6	0.031	TL02	AMP Plug P□□□-04075A04  Round plug P□□□-04075Y104 P□□□-04075Y204	AMP Plug E□□□-DB15□□A09  Round plug E□□□-DB15□□Y109 E□□□-DB15□□Y209	AMP Plug B□□□-02050A02  Round plug B□□□-02050Y102 B□□□-02050Y202
060GSL01330	1.27	3000 (6000)	0.40	2.8	0.056	TL05			
080GSL01330	1.27	3000 (6000)	0.40	2.5	0.099	TL05			
080GSL02430	2.39	3000 (6000)	0.75	4.4	0.15	TL10、TL15			
110GSL04030	4.00	3000 (4000)	1.26	6.0	0.56	TL10、TL15	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03
110GSL06025	6.00	2500 (4000)	1.57	8.7	0.85	TL15、TL25			
130GSL05415	5.39	1500 (3000)	0.85	6.7	1.14	TL15			
130GSL08315	8.34	1500 (3000)	1.30	9.9	1.70	TL25			
130GSL11515	11.50	1500 (3000)	1.80	12.0	2.32	TL25、TL35			
130GSL15015	15.00	1500 (3000)	2.36	14.7	3.18	TL35			
<b>GAL series</b>									
110GAL04020	4.00	2000 (3000)	0.84	4.4	0.56	TL08、TL10	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03
110GAL06020	6.00	2000 (3000)	1.26	6.4	0.85	TL10、TL15			
130GAL05415	5.39	1500 (2000)	0.85	5.1	1.14	TL10			
130GAL08315	8.34	1500 (2000)	1.30	6.4	1.70	TL15、TL25			
130GAL11515	11.50	1500 (2000)	1.80	7.4	2.32	TL15、TL25			
130GAL15010	15.00	1000 (1500)	1.57	6.7	3.18	TL15、TL25			
130GAL15015	15.00	1500 (2000)	2.36	9.5	3.18	TL25、TL35			

# Combinations of motors(380V), EP1C and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-4</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable	
<b>MAH series</b>										
110MAH04030	4.00	3000 (5500)	1.26	4.00	0.31	TH10、TH15	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03	
110MAH06030	6.00	3000 (4000)	1.88	4.80	0.50	TH15、TH20				
130MAH04025	4.00	2500 (4500)	1.00	2.70	0.48	TH10				
130MAH04820	4.77	2000 (4500)	1.00	3.40	0.48	TH10、TH15				
130MAH05025	5.00	2500 (4500)	1.30	3.70	0.48	TH15				
130MAH06025	6.00	2500 (4000)	1.57	4.10	0.65	TH15、TH20				
130MAH07725	7.70	2500 (4000)	2.02	5.00	0.83	TH15、TH20				
130MAH10015	10.00	1500 (2500)	1.57	4.30	0.94	TH15、TH20				
130MAH15015	15.00	1500 (2500)	2.36	6.20	1.41	TH20、TH30				
180MAH19015	19.00	1500 (1800)	3.00	7.80	6.50	TH30				P□□□-04150H04B
180MAH27015	27.00	1500 (1800)	4.30	10.00	9.10	TH30、TH50				P□□□-04250H04B
180MAH35015	35.00	1500 (1800)	5.50	13.60	11.80	TH50				P□□□-04400H04B
180MAH48015	48.00	1500 (1800)	7.50	17.50	15.80	TH75				
<b>GAH series</b>										
130GAH05415	5.39	1500 (3000)	0.85	3.10	1.14	TH10	P□□□-04150H04	E□□□-DB15□□H15	B□□□-02050H03	
130GAH08315	8.34	1500 (3000)	1.30	4.90	1.70	TH15、TH20				
130GAH10025	10.00	2500 (3000)	2.67	5.40	2.32	TH20、TH30				
130GAH11515	11.50	1500 (2000)	1.80	4.30	2.32	TH15、TH20				
130GAH15015	15.00	1500 (2000)	2.36	6.60	3.36	TH20、TH30				

**Note:**

1. The servo motor of base number "40" only supports the 23 bit ABS encoder.
2. The "□□□" in the above table represents cable length. Please refer to the introduction of cable specification.
3. The "□□" in "encoder cable" list above represents encoder type. "B0" stands for 23 bit INC encoder, and "E0" stands for 23 bit ABS encoder. For more details, please refer to the introduction of cable specification.

# Combinations of motors(220V), EP1C Plus and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-4</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable			
<b>MSL series</b>												
040MSL00330	0.32	3000 (5000)	0.10	1.10	0.0035	TL01	P□□□-04075A04	E□□□-DB09E0A09	BP□□□-06075A06			
060MSL00630	0.64	3000 (6000)	0.20	1.90	0.017	TL02	AMP Plug P□□□-04075A04  Round plug P□□□-04075Y104 P□□□-04075Y204	AMP Plug E□□□-DB09□□A09  Round plug E□□□-DB09□□Y109 E□□□-DB09□□Y209	AMP Plug B□□□-02050A02  Round plug B□□□-02050Y102 B□□□-02050Y202			
060MSL01330	1.27	3000 (6000)	0.40	2.90	0.027	TL05						
080MSL01330	1.27	3000 (6000)	0.40	2.60	0.068	TL05						
080MSL02430	2.39	3000 (6000)	0.75	5.30	0.113	TL10、TL15						
080MSL03230	3.18	3000 (6000)	1.00	6.90	0.113	TL10、TL15						
130MSL04025	4.00	2500 (4000)	1.00	5.10	0.48	TL10、TL15	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03			
130MSL04820	4.77	2000 (4000)	1.00	5.80	0.48	TL10、TL15						
130MSL05025	5.00	2500 (4000)	1.30	6.10	0.48	TL15						
130MSL09620	9.55	2000 (4000)	2.00	11.30	0.94	TL25						
130MSL10025	10.00	2500 (4000)	2.60	11.50	0.94	TL25、TL35						
130MSL14320	14.30	2000 (3500)	3.00	14.10	1.41	TL35	P□□□-04250H04					
<b>MAL series</b>												
110MAL04030	4.00	3000 (4000)	1.26	5.50	0.31	TL10、TL15	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03			
110MAL06030	6.00	3000 (3500)	1.88	6.80	0.50	TL15、TL25						
130MAL06025	6.00	2500 (3000)	1.57	6.40	0.65	TL15、TL25						
130MAL07725	7.70	2500 (3000)	2.02	7.70	0.83	TL15、TL25						
130MAL10015	10.00	1500 (2000)	1.57	6.90	0.94	TL15、TL25						
130MAL15015	15.00	1500 (2000)	2.36	9.50	1.41	TL25、TL35						
<b>GSL series</b>												
060GSL00630	0.64	3000 (6000)	0.20	1.6	0.031	TL02	AMP Plug P□□□-04075A04  Round plug P□□□-04075Y104 P□□□-04075Y204	AMP Plug E□□□-DB09□□A09  Round plug E□□□-DB09□□Y109 E□□□-DB09□□Y209	AMP Plug B□□□-02050A02  Round plug B□□□-02050Y102 B□□□-02050Y202			
060GSL01330	1.27	3000 (6000)	0.40	2.8	0.056	TL05						
080GSL01330	1.27	3000 (6000)	0.40	2.5	0.099	TL05						
080GSL02430	2.39	3000 (6000)	0.75	4.4	0.15	TL10、TL15						
110GSL04030	4.00	3000 (4000)	1.26	6.0	0.56	TL10、TL15	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03			
110GSL06025	6.00	2500 (4000)	1.57	8.7	0.85	TL15、TL25						
130GSL05415	5.39	1500 (3000)	0.85	6.7	1.14	TL15						
130GSL08315	8.34	1500 (3000)	1.30	9.9	1.70	TL25						
130GSL11515	11.50	1500 (3000)	1.80	12.0	2.32	TL25、TL35						
130GSL15015	15.00	1500 (3000)	2.36	14.7	3.18	TL35						
										P□□□-04250H04		
<b>GAL series</b>												
110GAL04020	4.00	2000 (3000)	0.84	4.4	0.56	TL08、TL10	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03			
110GAL06020	6.00	2000 (3000)	1.26	6.4	0.85	TL10、TL15						
130GAL05415	5.39	1500 (2000)	0.85	5.1	1.14	TL10						
130GAL08315	8.34	1500 (2000)	1.30	6.4	1.70	TL15、TL25						
130GAL11515	11.50	1500 (2000)	1.80	7.4	2.32	TL15、TL25						
130GAL15010	15.00	1000 (1500)	1.57	6.7	3.18	TL15、TL25						
130GAL15015	15.00	1500 (2000)	2.36	9.5	3.18	TL25、TL35						

# Combinations of motors(380V), EP1C Plus and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-4</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable
<b>MAH series</b>									
110MAH04030	4.00	3000 (5500)	1.26	4.00	0.31	TH10、TH15	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
110MAH06030	6.00	3000 (4000)	1.88	4.80	0.50	TH15、TH20			
130MAH04025	4.00	2500 (4500)	1.00	2.70	0.48	TH10			
130MAH04820	4.77	2000 (4500)	1.00	3.40	0.48	TH10、TH15			
130MAH05025	5.00	2500 (4500)	1.30	3.70	0.48	TH15			
130MAH06025	6.00	2500 (4000)	1.57	4.10	0.65	TH15、TH20			
130MAH07725	7.70	2500 (4000)	2.02	5.00	0.83	TH15、TH20			
130MAH10015	10.00	1500 (2500)	1.57	4.30	0.94	TH15、TH20			
130MAH15015	15.00	1500 (2500)	2.36	6.20	1.41	TH20、TH30			
180MAH19015	19.00	1500 (1800)	3.00	7.80	6.50	TH30			
180MAH27015	27.00	1500 (1800)	4.30	10.00	9.10	TH30、TH50	P□□□-04250H04B		
180MAH35015	35.00	1500 (1800)	5.50	13.60	11.80	TH50			
180MAH48015	48.00	1500 (1800)	7.50	17.50	15.80	TH75	P□□□-04400H04B		
<b>GAH series</b>									
130GAH05415	5.39	1500 (3000)	0.85	3.10	1.14	TH10	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
130GAH08315	8.34	1500 (3000)	1.30	4.90	1.70	TH15、TH20			
130GAH10025	10.00	2500 (3000)	2.67	5.40	2.32	TH20、TH30			
130GAH11515	11.50	1500 (2000)	1.80	4.30	2.32	TH15、TH20			
130GAH15015	15.00	1500 (2000)	2.36	6.60	3.36	TH20、TH30			

**Note:**

1. The servo motor of base number "40" only supports the 23 bit ABS encoder.
2. The "□□□□" in the above table represents cable length. Please refer to the introduction of cable specification.
3. The "□□□" in "encoder cable" list above represents encoder type. "B0" stands for 23 bit INC encoder, and "E0" stands for 23 bit ABS encoder. For more details, please refer to the introduction of cable specification.

# Combinations of motors(220V), EP3E and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-3</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable
<b>MSL series</b>									
040MSL00330	0.32	3000 (5000)	0.10	1.10	0.0035	GL1A0	P□□□-04075A04	E□□□-DB09E0A09	BP□□□-06075A06
060MSL00630	0.64	3000 (6000)	0.20	1.90	0.017	GL1A8	AMP Plug P□□□-04075A04	AMP Plug E□□□-DB09□□A09	AMP Plug B□□□-02050A02
060MSL01330	1.27	3000 (6000)	0.40	2.90	0.027	GL3A0	Round plug P□□□-04075Y104 P□□□-04075Y204	Round plug E□□□-DB09□□Y109 E□□□-DB09□□Y209	Round plug B□□□-02050Y102 B□□□-02050Y202
080MSL01330	1.27	3000 (6000)	0.40	2.60	0.068	GL3A0			
080MSL02430	2.39	3000 (6000)	0.75	5.30	0.113	GL5A5, GL7A5			
080MSL03230	3.18	3000 (6000)	1.00	6.90	0.113	GL5A5, GL7A5			
130MSL04025	4.00	2500 (4000)	1.00	5.10	0.48	GL5A5, GL7A5	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
130MSL04820	4.77	2000 (4000)	1.00	5.80	0.48	GL5A5, GL7A5			
130MSL05025	5.00	2500 (4000)	1.30	6.10	0.48	GL7A5			
130MSL09620	9.55	2000 (4000)	2.00	11.30	0.94	GL120, GL160			
130MSL10025	10.00	2500 (4000)	2.60	11.50	0.94	GL120, GL160			
130MSL14320	14.30	2000 (3500)	3.00	14.10	1.41	GL160, GL190	P□□□-04250H04		
<b>MAL series</b>									
110MAL04030	4.00	3000 (4000)	1.26	5.50	0.31	GL5A5, GL7A5	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
110MAL06030	6.00	3000 (3500)	1.88	6.80	0.50	GL7A5, GL120			
130MAL06025	6.00	2500 (3000)	1.57	6.40	0.65	GL7A5, GL120			
130MAL07725	7.70	2500 (3000)	2.02	7.70	0.83	GL7A5, GL120			
130MAL10015	10.00	1500 (2000)	1.57	6.90	0.94	GL7A5, GL120			
130MAL15015	15.00	1500 (2000)	2.36	9.50	1.41	GL120, GL160			
<b>GSL series</b>									
060GSL00630	0.64	3000 (6000)	0.20	1.6	0.031	GL1A8	AMP Plug P□□□-04075A04	AMP Plug E□□□-DB09□□A09	AMP Plug B□□□-02050A02
060GSL01330	1.27	3000 (6000)	0.40	2.8	0.056	GL3A0	Round plug P□□□-04075Y104 P□□□-04075Y204	Round plug E□□□-DB09□□Y109 E□□□-DB09□□Y209	Round plug B□□□-02050Y102 B□□□-02050Y202
080GSL01330	1.27	3000 (6000)	0.40	2.5	0.099	GL3A0			
080GSL02430	2.39	3000 (6000)	0.75	4.4	0.15	GL5A5, GL7A5			
110GSL04030	4.00	3000 (4000)	1.26	6.0	0.56	GL5A5, GL7A5	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
110GSL06025	6.00	2500 (4000)	1.57	8.7	0.85	GL7A5, GL120			
130GSL05415	5.39	1500 (3000)	0.85	6.7	1.14	GL7A5			
130GSL08315	8.34	1500 (3000)	1.30	9.9	1.70	GL120			
130GSL11515	11.50	1500 (3000)	1.80	12.0	2.32	GL120, GL160			
130GSL15015	15.00	1500 (3000)	2.36	14.7	3.18	GL160, GL190	P□□□-04250H04		
<b>GAL series</b>									
110GAL04020	4.00	2000 (3000)	0.84	4.4	0.56	GL5A5	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
110GAL06020	6.00	2000 (3000)	1.26	6.4	0.85	GL5A5, GL7A5			
130GAL05415	5.39	1500 (2000)	0.85	5.1	1.14	GL5A5			
130GAL08315	8.34	1500 (2000)	1.30	6.4	1.70	GL7A5, GL120			
130GAL11515	11.50	1500 (2000)	1.80	7.4	2.32	GL7A5, GL120			
130GAL15010	15.00	1000 (1500)	1.57	6.7	3.18	GL7A5, GL120			
130GAL15015	15.00	1500 (2000)	2.36	9.5	3.18	GL120, GL160			




# Combinations of motors(380V), EP3E and accessories

Motor model	Torque N·m	Speed rpm	Power kW	Rated current Arms	Rotor inertia (×10 <sup>-4</sup> kg·m <sup>2</sup> )	Available match	Power cable	Encoder cable	Brake cable
<b>MAH series</b>									
110MAH04030	4.00	3000 (5500)	1.26	4.00	0.31	GH3A5、GH5A4	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
110MAH06030	6.00	3000 (4000)	1.88	4.80	0.50	GH5A4、GH8A5			
130MAH04025	4.00	2500 (4500)	1.00	2.70	0.48	GH3A5			
130MAH04820	4.77	2000 (4500)	1.00	3.40	0.48	GH3A5、GH5A4			
130MAH05025	5.00	2500 (4500)	1.30	3.70	0.48	GH5A4			
130MAH06025	6.00	2500 (4000)	1.57	4.10	0.65	GH5A4、GH8A5			
130MAH07725	7.70	2500 (4000)	2.02	5.00	0.83	GH5A4、GH8A5			
130MAH10015	10.00	1500 (2500)	1.57	4.30	0.94	GH5A4、GH8A5			
130MAH15015	15.00	1500 (2500)	2.36	6.20	1.41	GH8A5、GH130			
180MAH19015	19.00	1500 (1800)	3.00	7.80	6.50	GH130			
180MAH27015	27.00	1500 (1800)	4.30	10.00	9.10	GH130、GH170	P□□□-04250H04B		
180MAH35015	35.00	1500 (1800)	5.50	13.60	11.80	GH170			
180MAH48015	48.00	1500 (1800)	7.50	17.50	15.80	GH210	P□□□-04400H04B		
<b>GAH series</b>									
130GAH05415	5.39	1500 (3000)	0.85	3.10	1.14	GH3A5	P□□□-04150H04	E□□□-DB09□□H15	B□□□-02050H03
130GAH08315	8.34	1500 (3000)	1.30	4.90	1.70	GH5A4、GH8A5			
130GAH10025	10.00	2500 (3000)	2.67	5.40	2.32	GH8A5、GH130			
130GAH11515	11.50	1500 (2000)	1.80	4.30	2.32	GH5A4、GH8A5			
130GAH15015	15.00	1500 (2000)	2.36	6.60	3.36	GH8A5、GH130			

**Note:**

1. The servo motor of base number "40" only supports the 23 bit ABS encoder.
2. The "□□□" in the above table represents cable length. Please refer to the introduction of cable specification.
3. The "□□" in "encoder cable" list above represents encoder type. "B0" stands for 23 bit INC encoder, and "E0" stands for 23 bit ABS encoder. For more details, please refer to the introduction of cable specification.



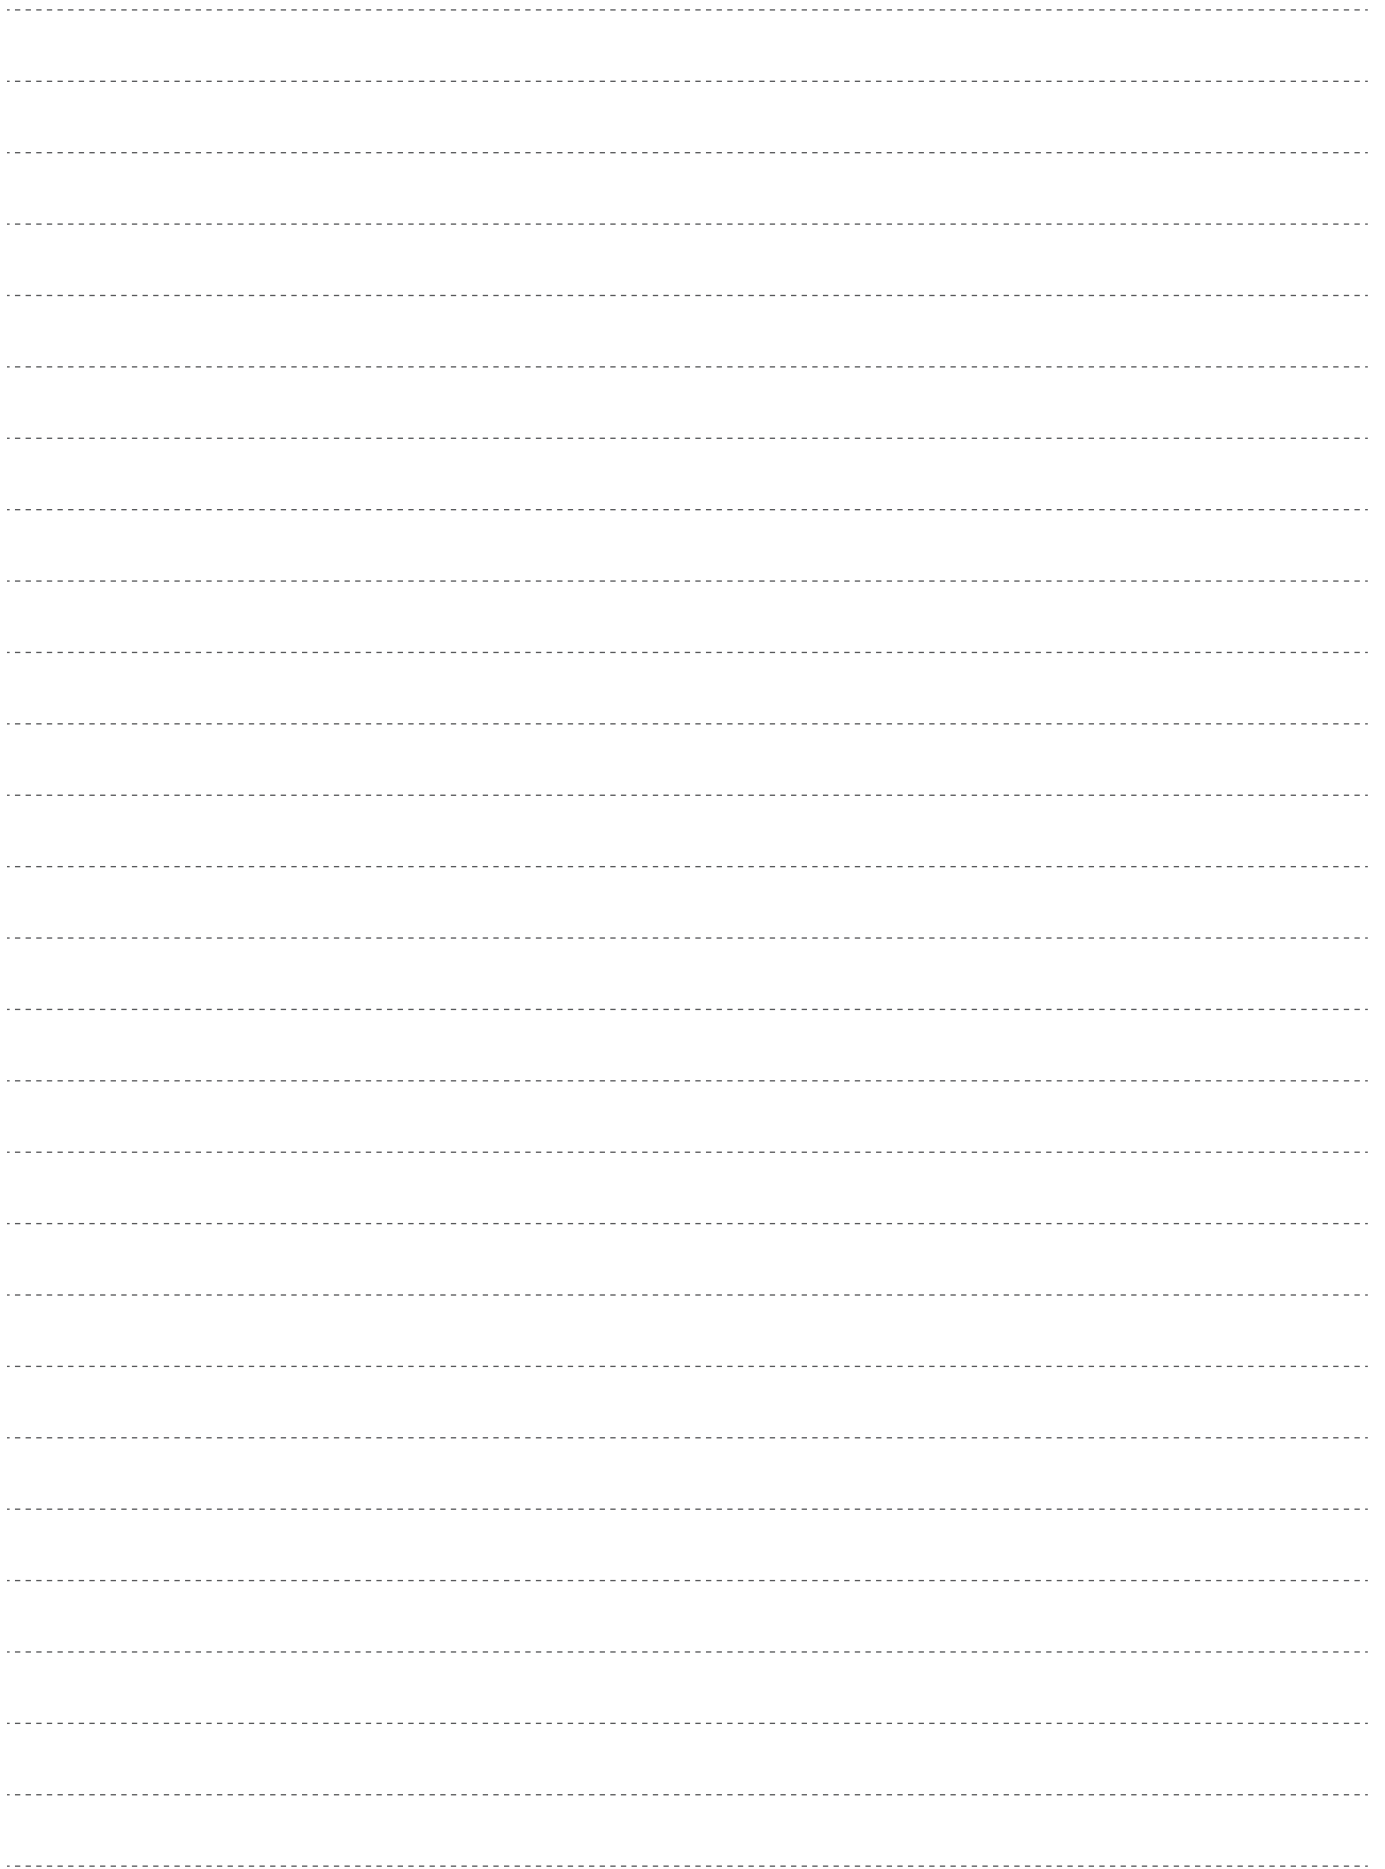



Contact:

+86-27-87920040



## Maxsine 迈信电气

Wuhan Maxsine Electric Co.,Ltd.

Address: Building A6, Hangyu Building, No 7, Wuhan University Science Park Road, East Lake Development District, Wuhan, China.

TEL: +86-27-87920040

FAX: +86-27-87921290

POST CODE: 430223

Http: [www.maxsine.com](http://www.maxsine.com)

Email: [maxsine\\_sales@maxsine.com](mailto:maxsine_sales@maxsine.com)



Please scan it by wechat to learn more about Maxsine